

## FIXTURE SPECIFICATIONS

### INTENDED USE

The Alcon Lighting Elite Architectural LED Center Basket Troffer is designed to reflect light from its matte surface to provide a glare-free, softened "sky light" appearance where abundant and comfortable lighting is needed. The Elite series is configured for recessed applications in commercial and industrial buildings and is ideal for schools and offices.

### AVAILABLE SIZES


**2x2** | W 23.94" x L 23.75" x D 5.5"  
**2x4** | W 23.75" x L 47.75" x D 5.5"  
**1x4** | W 11.94" x L 48" x D 5.5"

### FEATURES

**Construction:** Die-formed, cold-rolled heavy gauge steel housing Corrosion Resistant  
**Diffuser:** Perforated metal diffuser with white acrylic overlay  
**Mounting:** Recessed mount in expose T-Bar ceilings  
**Voltage:** 120-277V (50/60 Hz) Constant Current  
**CRI:** 80+  
**Dimming:** 0-10V 100%~10%  
**Life:** L70 - 50,000 Hours  
**Operating Temperature:** -4°F ~ 122°F  
**Power Factor:** +0.9  
**Efficiency:** +85%  
**THD:** <20  
**Listing:** Suitable for damp locations, ARRA Compliant  
**Warranty:** 5 Years Carefree for Parts & Components (Labor Not Included)



2x2





2x4



## ORDERING INFORMATION Example 4000-22-27 ( )



Model	Size	Wattage   Lumens	Color Temperature	Options
14000	2x2	<b>22</b> 27 Watts, 1727 lms	<b>30K</b> 3000K	<b>OS</b>
		<b>36</b> 36 Watts, 2133 lms		Occupancy Sensor
		<b>44</b> 44 Watts, 2235 lms		<b>DPL</b>
	2x4	<b>44</b> 44 Watts, 2235 lms	<b>40K</b> 4000K	Dust/Bug Proof Clear Acrylic Lens
		<b>54</b> 54 Watts, 2736 lms	<b>50K</b> 5000K	Run
		<b>68</b> 68 Watts, 7536 lms	<b>60K</b> 6000K	<b>EM5</b>
14000	1x4	<b>14</b> 14 Watts, 213 lms		5W Emergency Ballast
		<b>44</b> 44 Watts, 2235 lms		<b>EM8</b>
				8W Emergency Ballast
				<b>EM16</b>
				16W Emergency Ballast

## FIXTURE DIMENSIONS

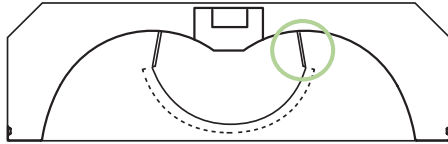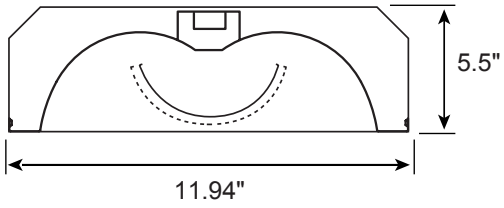

DPL lens option

1x4

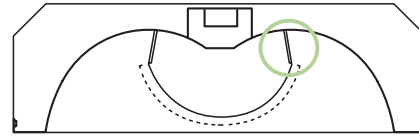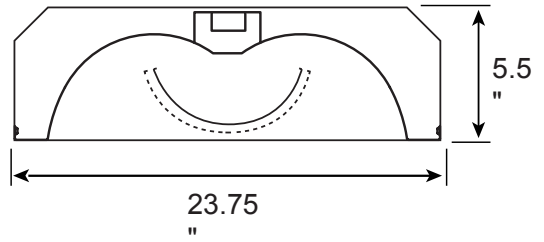

DPL lens option

2x2

2x4