





FIXTURE SPECIFICATIONS

INTENDED USE

The Specification Grade Alcon Lighting 14053 Architectural LED Recessed Flat Panel Light Troffer offers abundant light and a modern slim design perfect for today's interior spaces, suited for recessed mount applications for offices, conference rooms, corridors, schools, labs, and public spaces. Surface and Suspension mounting kits available.

FEATURES

- Construction:** High-grade aluminum frame
- CRI:** 80
- Voltage:** 120-277V 50/60Hz
- Dimming:** 0-10V Dimmable
- Mounting:** Recessed; T-Bar Frame (Standard)
- Color Temperature Select:** Capable of delivering 3000K, 3500K, 4000K & 5000K Color Temperatures
- Lumens:**
 1x4: 105 lms per watt
 2x2: 106 lm per watt
 2x4: 112 lm per watt
- Life:** 50,000 Hour
- Operating Temperature:** -4°F ~ 122°F (-20°C ~ 50°C)
- Power Factor:** > 0.95
- Listings:** UL/cUL, DLC, FCC, RoHS, IP40, LM-80, LM-79
- Warranty:** 5 Years Carefree for Parts & Components (Labor Not Included)

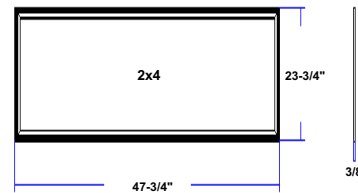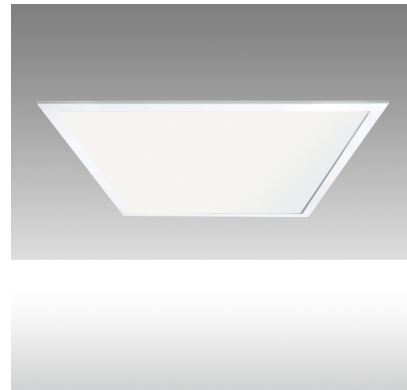

ORDERING INFORMATION Example: (14053-14)

Model	Size Wattage	Options
14053	14 1x4 Power Selectable: 30W, 35W, 40W, 45W	SF Surface Mount Kit
	22 2x2 Power Selectable: 30W, 35W, 40W, 45W	SP Suspension Mount Kit
	24 2x4 Power Selectable: 35W, 40W, 45W, 50W	EM5 5W Remote Emergency Back-up Battery
		EM10 10W Remote Emergency Back-up Battery