

FEATURES & SPECIFICATIONS

INTENDED USE

The **iLED 2x4 Architectural LED Surface Mount Recessed Troffer** is a Specification Grade low profile fixture and is the ideal solution for commercial and industrial applications looking for comfortable, bright lighting, enhanced energy savings, long life, and easy and economical maintenance. The iLED Architectural LED Surface Mount Recessed Troffer offers the flexibility to easily change wattage, lumens, and color temperature.

DETAILS

W 23.75" x **L** 48" x **Dp** 3.75"

Construction: Die-formed and embossed code 22 gauge steel housing

Finish: High reflectance baked white enamel

Lens: Clear 0.10 thick A12 Acrylic

ADDITIONAL FEATURES



Voltage: 120-277 UNV

Support: Direct Surface Mount

Life: 50,000 Hrs

Operating Temp: -20°C to 50°C

Lamp Included

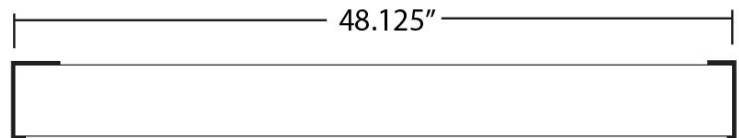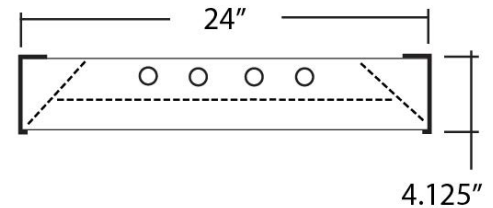

Ordering Information:

Example: (14057-36W-30K-010-EM)

Model	Wattage and Lumens	Color Temp	Dimming	Finish
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
14057	36W 36W (2x18W), 4200 lms 54W 54W (3x18W), 6300 lms 72W 72W (4x18W), 8400 lms	30K 3000K 40K 4000K 50K 5000K	(Blank) Non-Dimming (<i>Standard</i>) 010 0-10V Dimming (5-Wire)	(Blank) White BK Black SL Silver BZ Bronze

Options



EM Emergency Backup Battery