

FEATURES & SPECIFICATIONS

INTENDED USE

The **iLED 2x2 Architectural LED Surface Mount Recessed Troffer** is a Specification Grade low profile fixture and is the ideal solution for commercial and industrial applications looking for comfortable, bright lighting, enhanced energy savings, long life, and easy and economical maintenance. The iLED Architectural LED Surface Mount Recessed Troffer offers the flexibility to easily change wattage, lumens, and color temperature.

DETAILS

W 23.75" x **L** 24" x **Dp** 3.75"

Construction: Die-formed and embossed code 22 gauge steel housing

Finish: High reflectance baked white enamel

Lens: Clear 0.10 thick A12 Acrylic



ADDITIONAL FEATURES

Voltage: 120-277 UNV

Support: Direct Surface Mount

Life: 50,000 Hrs

Operating Temp: -20°C to 50°C
Lamp Included

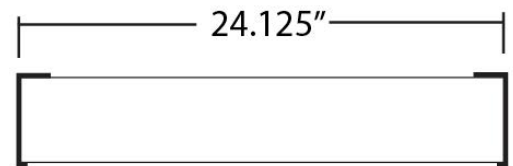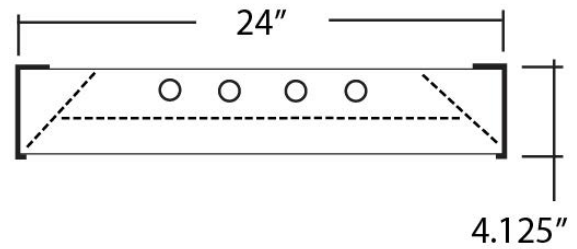

Ordering Information:

Example: (14058-30W-30K-010-EM)

Model	Wattage and Lumens	Color Temp	Dimming	Finish
<input type="text" value="14058"/>	<input type="text" value="30W 30W (2x15W), 3600 lms"/>	<input type="text" value="30K 3000K"/>	<input type="text" value="(Blank) Non-Dimming (Standard)"/>	<input type="text" value="(Blank) White"/>
	<input type="text" value="45W 45W (3x15W), 5400 lms"/>	<input type="text" value="40K 4000K"/>		<input type="text" value="BK Black"/>
	<input type="text" value="60W 60W (4x15W), 7200 lms"/>	<input type="text" value="50K 5000K"/>	<input type="text" value="010 0-10V Dimming (5-Wire)"/>	<input type="text" value="SL Silver"/>
				<input type="text" value="BZ Bronze"/>

Options



EM Emergency Backup Battery