

FEATURES & SPECIFICATIONS

INTENDED USE

The **HiLED** Architectural LED Surface Mount Recessed Troffer is a high performance fixture designed with high efficiency and performance while providing excellent visual control and subtle soft indirect illumination. The HiLED Series is ideal for commercial and institutional environments.

DETAILS

W 23.75" x **L** 24" x **Dp** 3.75"

Construction: Die-Formed and Cold-Rolled 20 Gauge Steel Housing

Corrosion Resistant

Shielding: Dual Slope Panels to Provide Low-Brightness Glow

Mounting: Recessed Mounted in Exposed T-bar Ceilings

Finish: High-Gloss Baked White Enamel

Electrical: Class 2, Constant Current

ADDITIONAL FEATURES

Voltage: 120-277 UNV

Dimming: 0-10V 1~100%

CRI: 83+

Power Factor: +0.9


Efficiency: +85%

Life: 100,000 Hours

Operating Temp: -22°F-122°F

Listings: Suitable for Damp Locations

ARRA Compliant

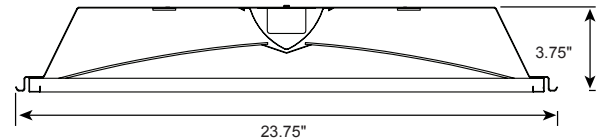

Ordering Information:

Example: (14061-28W-30K)

Model	Wattage and Lumens	Color Temp	Options
14061	28W 28 watts, 2050 lms 36W 36 watts, 2726 lms 44W 44 watts, 3402 lms	30K 3000K 35K 3500K 40K 4000K 50K 5000K	FK Flange Kit (<i>Field Installed</i>) EM5 5W Emergency Ballast EM8 8W Emergency Ballast EM16 16W Emergency Ballast