

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

The **HiLED Architectural LED Recessed Troffer** is a high performance fixture designed with high efficiency and performance while providing excellent visual control and subtle soft indirect illumination. The HiLED Series is ideal for commercial and institutional environments.

AVAILABLE SIZES

2x2 | W 23.75" x L 24" x Dp 3.75"
2x4 | W 23.75" x L 47.75" x Dp 3.75"
1x4 | W 11.75" x L 48" x Dp 3.75"

FEATURES

Construction: Die-Formed and Cold-Rolled 20 Gauge Steel Housing
Corrosion Resistant

Shielding: Dual Slope Panels to Provide Low-Brightness Glow

Mounting: Recessed Mounted in Exposed T-bar Ceilings

Finish: High-Gloss Baked White Enamel

Electrical: Class 2, Constant Current

Voltage: 120-277V (50/60 Hz) Constant Current

Dimming: 0-10V 1~100%

CRI: 83+

Power Factor: +0.9

Efficiency: +85%

Life: 100,000 Hours

Operating Temp: -22°F-122°F

Listings: Suitable for Damp Locations, ARRA Compliant


Warranty: 5 Years Carefree for Parts & Components (Labor Not Included)




ORDERING INFORMATION Example: (14061-14-25-30K)

Model	Size	Wattage Lumens	Color Temperature	Options
14061	14 1x4	1x4 Options 25 25 Watts, 2498 lms	30K 3000K 35K 3500K 40K 4000K 50K 5000K	EM8 8W Emergency Backup Battery
		41 41 Watts, 4193 lms		
		54 54 Watts, 5588 lms		
	22 2x2	2x2 Options 28 28 Watts, 3327 lms		EM15 15W Emergency Backup Battery
		36 36 Watts, 4380 lms		
		44 44 Watts, 5304 lms		
	24 2x4	2x4 Options 25 28 Watts, 3668 lms		EM20 20W Emergency Backup Battery
		36 36 Watts, 4828 lms		
		44 44 Watts, 5847 lms		
		56 56 Watts, 7461 lms		
		68 68 Watts, 9062 lms		
				F Flange Kit (Field Installed)

FIXTURE DIMENSIONS

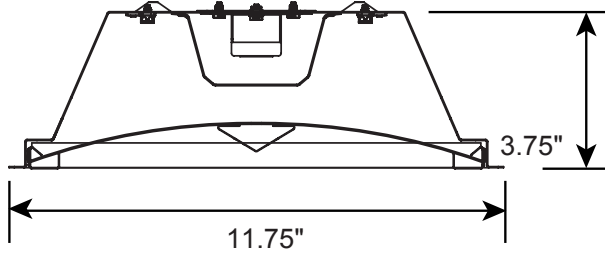

1x4

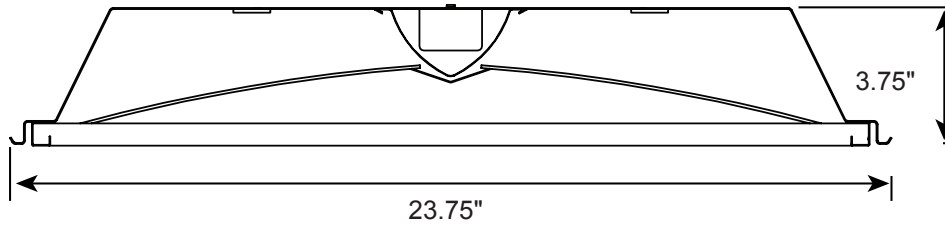

2x2

2x4