

FEATURES & SPECIFICATIONS

INTENDED USE

The **HiLED** Architectural LED Surface Mount Recessed Troffer is a high performance fixture designed with high efficiency and performance while providing excellent visual control and subtle soft indirect illumination. The HiLED Series is ideal for commercial and institutional environments.

DETAILS

W 23.75" x **L** 47.75" x **Dp** 3.75"

Construction: Die-Formed and Cold-Rolled 20 Gauge Steel Housing


Corrosion Resistant

Shielding: Dual Slope Panels to Provide Low-Brightness Glow

Mounting: Recessed Mounted in Exposed T-bar Ceilings

Finish: High-Gloss Baked White Enamel

Electrical: Class 2, Constant Current

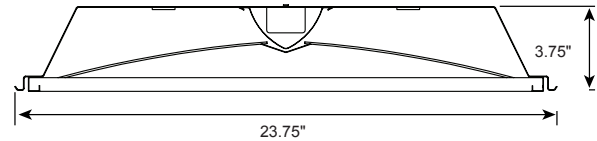

ADDITIONAL FEATURES

Voltage: 120-277 UNV

Dimming: 0-10V 1~100%

CRI: 83+

Power Factor: +0.9

Efficiency: +85%

Life: 100,000 Hours

Operating Temp: -22°F-122°F

Listings: Suitable for Damp Locations

ARRA Compliant

Ordering Information:

Example: (14062-44W-30K)

Model	Wattage and Lumens	Color Temp	Options
14062	44W 44 watts, 3402 lms 56W 56 watts, 4415 lms 68W 68 watts, 5429 lms	30K 3000K 35K 3500K 40K 4000K 50K 5000K	FLK Flange Kit (<i>Field Installed</i>) EM5 5W Emergency Ballast EM8 8W Emergency Ballast EM16 16W Emergency Ballast