



SHOP NOW >

FEATURES & SPECIFICATIONS

INTENDED USE

The **illumine Architectural 5 Channel Color Tuning LED Linear Fixture** is a Specification Grade light fixture features a slim and discreet profile that delivers soft, dispersed, and glare-free illumination. The Illumine Series is ideal for today's modern commercial and institutional environments.

DETAILS

Model Number: 14072-3
3 FT - W 2.4" x L 36.3" x H 5"
Construction: Extruded Aluminum with powder coat finish


ADDITIONAL FEATURES

Type: Direct/Indirect
Voltage: 120-277 Universal
Dimming: 0-10V (Standard)
CRI: 95
Mounting: 96" Cable (More options available on request)
Lens: Extruded Satin Acrylic
Light Engine: Aluminum core LED board with integral driver and quick electrical disconnects for rapid tool-less servicing

OPTIONS

- 5 Channel Color Tuning:**
- Full spectrum color tuning
 - All white color temperatures (1650K-8000K)
 - Bluetooth app controlled: Lumenetix
 - Gamut control for unlimited control and customization using the Saturation and Hue controls
 - In-fixture component
- Daylight Sensor:** Wattstopper FD-301
Occupancy Sensor: Wattstopper FS-205/FS-305
Daylight/Occupancy Sensor: Wattstopper FSP-202

- Lutron Vive:**
 Wireless lighting control solution for new and existing commercial buildings, combining a variety of lighting control strategies with controls and sensors to maximize efficiency and system flexibility and reduce energy consumption by 60% or more.
- EcoSystem LDE:**
 Digital control, Hi-lume 1% EcoSystem LED driver with Soft-on, Fade-to- Black, External
- Ecosystem LDE5:**
 Digital control, 5-Series EcoSystem LED driver with flicker-free 100%-5% dimming, External

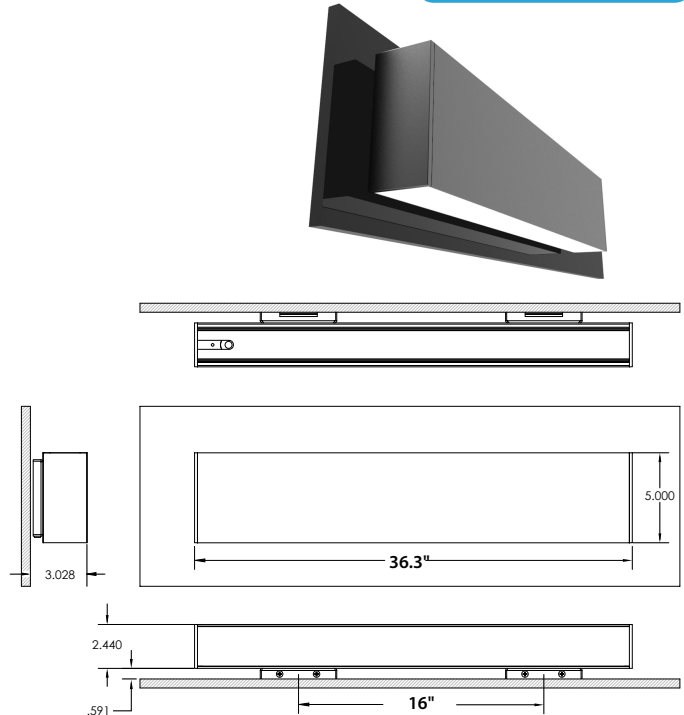

Ordering Information:

Example: (14072-3-DL-UL-5CC-WH-EM)

Model	Direct (Down)	Indirect (Up)	Color Temp	Finish
14072-3 illumine	DL 19.5 Watts, 1326 lms	(Blank) Direct Only	5CC 5 Channel Color Tuning	WH White
	DM 26.25 Watts, 1785 lms	UL 19.5 Watts, 1788 lms		SL Silver
	DH 39 Watts, 2652 lms	UM 26.25 Watts, 2409 lms		BK Black
		UH 39 Watts, 3579 lms		

Options

EM	Emergency Battery	LV1	Lutron Vive System Enabled ¹	LE1	Lutron LDE Series EcoSystem
DS	Daylight Sensor		0-10V Driver		1% Dimming, Soft On, Fade to Black
OS	Occupancy Sensor	LV2	Lutron Vive System Enabled ²	LE5	Lutron LDE5 Series EcoSystem
DO	Daylight/Occupancy Sensor		Standard DALI X% Driver		5% Dimming

¹External RF
²External RF w/
 Occupancy & Daylight Sensor

Alcon Lighting 14072-3 illumine Architectural 5 Channel Color Tuning LED 3 Foot Linear Wall Mount Direct/Indirect Light Strip Fixture