

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

Perfect for commercial applications, such as offices, medical facilities, gyms, warehouses and commercial kitchens, the fully enclosed high-output LED light provides up to 13,000 lumens in either of its 1-foot x 4-foot, 2-foot x 2-foot or 2-foot x 4-ft dimensions. Assembled in the USA.

FEATURES

Construction: Die-formed and welded 22-gauge cold rolled steel

Wet Location: Sealed with gaskets between the lens, door frame and housing guard against moisture

Mounting: Mounts to T-Bar ceiling

Lens: Glare-free snap-in frosted acrylic for even distribution



Voltage: 120-277V

Finish: White antimicrobial finish


Life: 54,000 hours

Warranty: 5 years (static colors) and 2 years (tunable white) carefree for parts & components (labor not included)

Listings: cULus Listed for Wet Location (covered ceilings only), DLC, LM79, CEC Compliant EM, Assembled in the USA

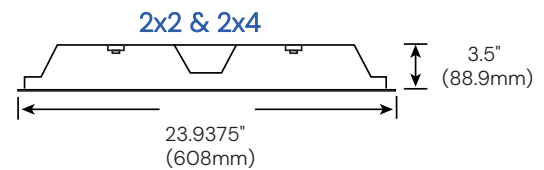

Standard Gaskets Provided



ORDERING INFORMATION Example: (14079-14-36-27K-8-010-WH-G-A12)

Model	Size	Wattage Lumens	Color Temp	CRI	Dimming	Door Frame	Trim Type	Diffuser	Options
14079	14 1x4	36 36 Watts 4850 Lumens	27K ¹ 2700K	8 80+	010 0-10V 10%-100%	WH White Aluminum	G Grid	A12 Acrylic Lens 0.125" Thick	EM5 5W EM Battery Backup
		44 44 Watts 5798 Lumens	30K 3000K	9 90+	BLS Bi-Level Step Dimming 50%/100%				
	24 2x4	54 54 Watts 7134 Lumens	35K 3500K	108 108 Watts 13088 Lumens	40K 4000K	BLSXX Bi-Level Step Dimming Replace X with Percentage from 10%-90%	FA1 Frosted Acrylic Lens 0.1" thick	A1 Acrylic Lens 0.1" Thick	EM16 16W EM Battery Backup
		72 72 Watts 9238 Lumens	40K 4000K			TLS Tri-Level Step Dimming 30%/70%/100%			
	24 2x4	54 54 Watts 7134 Lumens	35K 3500K	108 108 Watts 13088 Lumens	50K 5000K	TLSXX Tri-Level Step Dimming Replace X and X with Percentages from 10%-90%	PI2 Polycarbonate Lens 0.125" Thick	SA12 Smooth White Acrylic Lens 0.125" Thick	OCDH Occupancy Sensor w/ Daylight Harvesting
		72 72 Watts 9238 Lumens	40K 4000K			GTD Bodine Generator Transfer Device			

¹ Must be paired with 90+ CRI option
² Must be paired with 050 driver