

FEATURES & SPECIFICATIONS

INTENDED USE

The **Alcon Lighting Prestige LED Side Basket Troffer** is designed and configured to provide soft ambient lighting that is asymmetrically distributed to reduce shadows and glare. The Prestige is ideal for in commercial and industrial interiors such as schools, hospitals, warehouses and office lighting applications.

DETAILS

**W** 23.93" x **L** 23.75" x **D** 5.5"

**Construction:** Die-formed, cold-rolled, heavy gauge steel housing

Corrosion Resistant

IC Rated

**Finish:** White powder coated

**Reflectors:** Textured matte white

**Lens:** White acrylic lens and perforated metal basket

**Mounting:** Recessed mount in expose T-Bar ceilings  
Suitable for direct insulation contact

ADDITIONAL FEATURES

**Voltage:** 120-277

**CRI:** 82.8+



**Dimming:** 0-10V 100% ~ 1%

**Operating Temperature:** -4°F ~ 122°F

**Power Factor:** >0.95

**THD:** <20

**Listings:** Suitable for Damp Locations

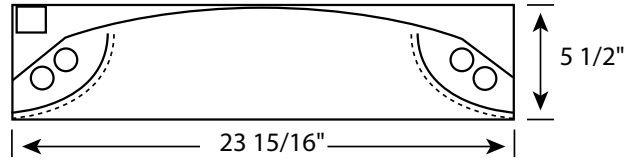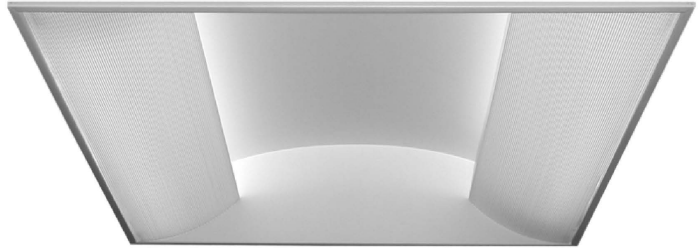

Ordering Information:

Example: (14081-36W-30K-FK-EM7)

Model	Wattage and Lumens	Color Temp	Trim Type	Options
<input type="text" value="14081"/>	<input type="text" value="36W 36 watts, 2133 lms"/>	<input type="text" value="30K 3000K"/>	<input type="text" value="(Blank) Grid"/>	<input type="text" value="EM7 7W Emergency Ballast"/>
	<input type="text" value="54W 54 watts, 3161 lms"/>	<input type="text" value="35K 3500K"/>	<input type="text" value="FK Flange&lt;sup&gt;1&lt;/sup&gt;"/>	<input type="text" value="EM10 10W Emergency Ballast"/>
		<input type="text" value="40K 4000K"/>		
		<input type="text" value="50K 5000K"/>		

<sup>1</sup> Flange kits are supplied in separate boxes, field installed.