

FIXTURE SPECIFICATIONS

INTENDED USE

The **SkyBox Architectural LED Regressed Flat Sky Light Panel** features an aesthetically pleasing recessed shroud that converts any flat panels into a sky light. The SkyBox is ideal for commercial lighting applications, including office lighting, retail lighting, as well as modern residential lighting.

AVAILABLE SIZES

2x2 Skybox | W 23.95" x L 23.95" x H 3.68"
2x4 Skybox | W 23.95" x L 47.65" x H 3.68"
1x4 Skybox | W 12" x L 47.65" x H 3.68"

2x2 Flat Panel | W 23.625 x L 23.625 x H .5"
2x4 Flat Panel | W 23.625 x L 47.25 x H .5"
1x4 Flat Panel | W 11.78 x L 47.25 x H .5"



FEATURES

Construction: Innovative recessed shroud and flat panel combined
Sealed Non-IC type high-grade aluminum

Mounting: T-Bar Recessed w/ Ballast Box

Light: UV/IR Free

Lens: Diffused Frosted

Finish: White

Voltage: 120-277V (50/60 Hz) Constant Current

Wattage & Lumen Switch: Switch from 20W (2200L), 30W (3300L), & 40W (4400L) for 2x2 and 1x4 sizes. Switch from 30W (2200L), 40W (3300L), & 50W (4400L) for 2x4.

Color Temperature Switch: Switch from 3000K, 3500K, 4000K, 5000K on a 4-position switch.

Dimming: 5-Wire 0-10V

CRI: 80+

Power Factor: >99

Life: L70 - 50,000 Hours

Driver: Class 2 Compliant

Listings: cULus Listed, RoHS, DLC


Warranty: 1 Year Carefree for Parts & Components (Labor Not Included)





ORDERING INFORMATION Example: (14090-22)

Model	Size	Options	Size	Wattage	Lumens	Color Temperature
14090	22	EM Emergency Backup Battery	1' x 4'	20W, 30W, 40W	2200lms, 3300lms, 4400lms	3000K, 3500K, 4000K, 5000K
	2x2		2' x 2'	20W, 30W, 40W	2200lms, 3300lms, 4400lms	3000K, 3500K, 4000K, 5000K
	24 2x4		2' x 4'	30W, 40W, 50W	3300lms, 4400lms, 5500lms	3000K, 3500K, 4000K, 5000K
	14 1x4					



FIXTURE DIMENSIONS

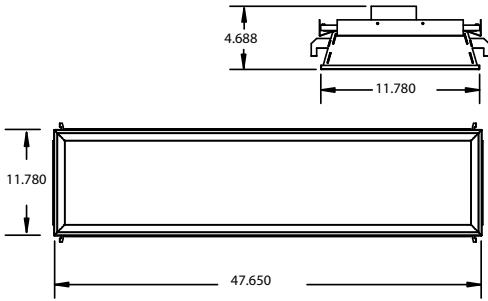

1x4

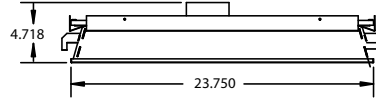

2x2

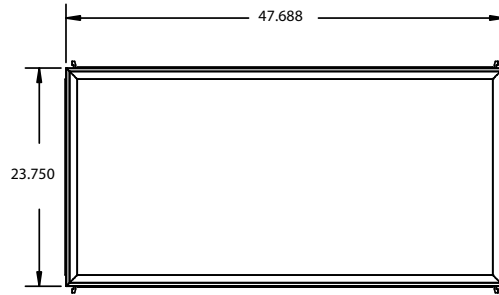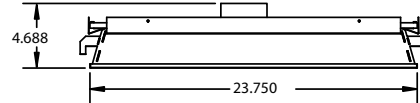

2x4