

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS


INTENDED USE

Available as a pendant, surface or wall mount, our ultra-thin LED fixture features a unique design that provides both energy efficiency and style. Offering field-adjustable color temperature switching, this fixture is suitable for applications such as office, banking, retail and classrooms.



DETAILS

- Construction:** 22 ga. cold rolled steel welded housing
- Finish:** White antimicrobial finished housing and door frame
- Mounting:** Pendant, wall and surface options available. Pendant mounting includes 4FT adjustable aircraft cable.
- Voltage:** 120V-277V, 50/60Hz
- Dimming:** 0-10V Dimmable
- CRI:** 80+
- Life:** 50,000 Hours
- Power Factor:** ≥ 0.9
- Total Harmonic Distortion:** ≤ 20%
- Warranty:** 5 years Carefree for parts & components (Labor not included)
- Listings:** cULus, Suitable for Damp Location, California Title 24, RoHS, Made in the USA



ANGLE	CANDLEPOWER		
	END	45	CROSS
0	3619	3619	3619
5	3563	3532	3545
15	3486	3522	3534
25	3225	3265	3280
35	2627	2605	2573
45	1645	1556	1471
55	763	711	666
65	307	274	244
75	126	101	73
85	73	45	11
90	30	14	2
95	18	10	2
105	23	10	1
115	23	10	2
125	20	10	2
135	16	8	2
145	10	7	1
155	6	7	0
165	7	4	0
175	1	0	0
180	0	0	0


ZONAL LUMEN SUMMARY			
DEGREES	LUMENS	% LAMP	% FIXTURE
0-30	2944	33.2	41.8
0-40	4479	52.3	65.8
0-60	6324	73.8	93
0-90	6743	78.7	99.1
90-120	35.5	0.4	0.5
90-150	55	0.7	0.8
90-180	59	0.7	0.9
0-180	6802	79.4	100

Luminaire Output = 6802 lm
Luminaire Efficacy = 105 lm/W

SPACING CRITERION	
ALONG	ACROSS
1.19	1.19

14129-64-40-CA

TYPE = 48 LED MODULE NO.
CRI = 80
L70(Hrs.) ~ 50,000
PHOTOMETRY TYPE = C

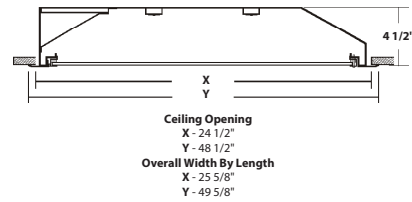

Ordering Information: Example: (14129-64-40-CA)

Model	Wattage Lumen	Color Temp	Lens	Options
14129	2 15 Watts 1820 Lumen	30 3000K	CA Clear Prismatic Acrylic HICA High Impact Clear Prismatic Acrylic FA Frosted Prismatic Acrylic	WL Wet Location TP Tamper Proof Screws (Hex Socket with Post) GSKN3 Three-Way Gasket EM10 10W Emergency Back-up Battery Pack
	4 30 Watts 3561 Lumen	35 3500K		
	6 47 Watts 5752 Lumen	40 4000K		
	8 64 Watts 6802 Lumen	50 5000K Color		
	12 105 Watts 9724 Lumen	TW Tunable White (2700K - 6500K)		