

## FIXTURE SPECIFICATIONS

### INTENDED USE

An elegant LED tracklight which provides high-CRI illumination for commercial, hospitality and residential interiors includes Color Temperature Select for versatility. Use this light for lighting today's office, classroom, conference room, museum, retail shop, hotel or restaurant.

### PRODUCT FAMILY ACCESSORIES

13000-TC	Track Channel
13000-LC	Linear Connector
13000-OA	Outlet Adapter
13000-SC	Slope Ceiling Track Adapter
13000-TB	T-Bar End Feed
13000-FC	Floating Canopy Connector
13000-EC	End Cap
13000-LC	Live End with Canopy
13000-LE	Live End
13000-L	L-Connector
13000-T	T-Connector
13000-X	X-Connector
13000-MC	Mini Connector
13000-CP	Cord and Plug Connector
13000-PA	Pendant Adapter
13000-CC	Conduit Connector
13000-CK	Conduit Continuation Kit

### FEATURES

**Construction:** Sleek, durable steel body with concealed heat sink, wiring, and internal adjustment mechanism allowing for maximum adjustability

**Connector:** 3-wire H-type 1 circuit & 2 circuit track (standard)

**Adjustable:** 350° rotation / 0°-180° gimbal

**Electrical:** Integral electronic constant current

**Voltage:** 120V

**Dimming:** 120V 2-wire/incandescent/ELV dimming

**CRI:** 90+

**Color Temperature:** 2700K/3000K/3500K/4000K/5000K select switch is standard for single head.

**Life:** 35,000 hours L70

**Listings:** ETL/cETL Listed for dry locations only

**Warranty:** 3 years carefree for parts & components (labor not included)



**R (Optional)**

Round Monopoint Canopy



**S (Optional)**

Square Monopoint Canopy




**ORDERING INFORMATION** Example: (14130-1-10W-FL45-CTS-WH)

Model	Wattage   Lumens	Beam Spread	Color Temp	Finish	Options	
<b>14130</b> Single Head	<b>10W</b> 10 Watts   800 lms	<b>SP15</b> 15° Spot <b>NF25</b> 25° Narrow Flood <b>FL45</b> 45° Flood <sup>Standard</sup>	<b>CTS</b> Color Temp Select (27K/30K/35K/40K/50K)	<b>WH</b> White <b>BK</b> Black <b>SL</b> Silver	<b>BH</b> Black Hexcell Louver <b>H<sup>1</sup></b> Halo-Type Connector <b>J<sup>1</sup></b> Juno-Type Connector <b>L<sup>1</sup></b> Lightleir-Type Connector <b>R</b> Round Monopoint Canopy <b>S</b> Square Monopoint Canopy	<b>SN</b> Snoot <b>RL</b> Red Lens <b>YL</b> Yellow Lens <b>AL</b> Amber Lens <b>BL</b> Blue Lens <b>GL</b> Green Lens

<sup>1</sup> Consult Factory + Extended Lead Time

## FIXTURE DIMENSIONS

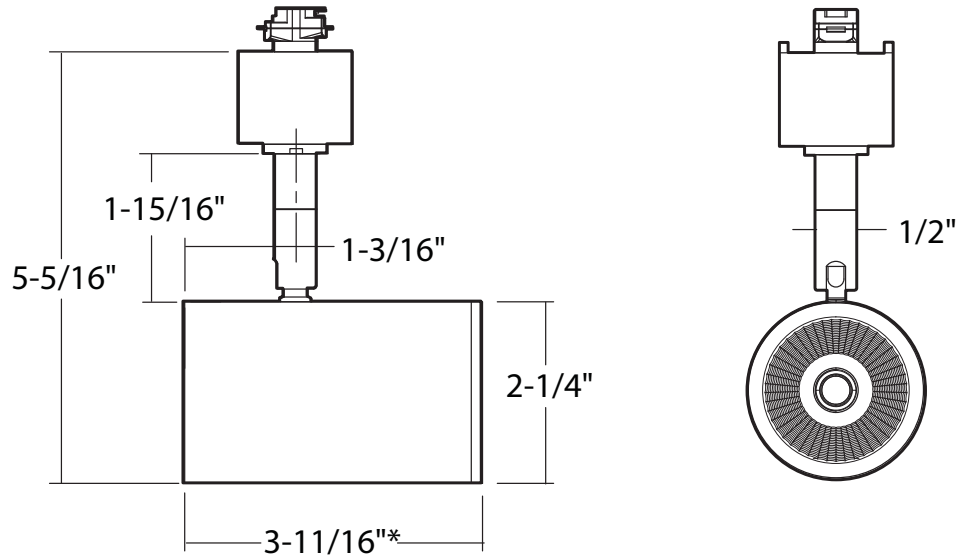

\*3-13/16" with addition of an Accessory Cap

