

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

Assembled in America and functional in wet locations, our intelligent lighting affords RGBW downlighting with control of light, giving each user freedom to adjust color and brightness. The color-changing recessed light's ideal for the office, retail space, learning or conference room, museum, hotel or restaurant and other trading spaces.

ADDITIONAL FEATURES

Construction: Heavy gauge die-formed galvanized steel mounting frame / open conical shape reflector

Mounting: Non-insulated ceilings or where insulation can be kept 3" from all side of housing.

Vertically adjustable brackets for conduit or C channel.

Ceiling Thickness: 1-1/2"

Junction Box: Galvanized steel with (7) 1/2" knockouts, (4) pryouts, snap-on cover

Voltage: 120-277V, 50-60Hz

Dimming: DMX/RDM Driver with 100% - 0.1% dimming. DMX/RDM controller required for use.


CRI: 80+ for White

Power Factor: > .9

Operating Temperature: -4°F to 122°F (-20°C to 50°C)

Warranty: 5 years carefree for parts & components (labor not included)

Listings: cULus Listed for Wet Location, CSA, ARRA, Assembled in the USA

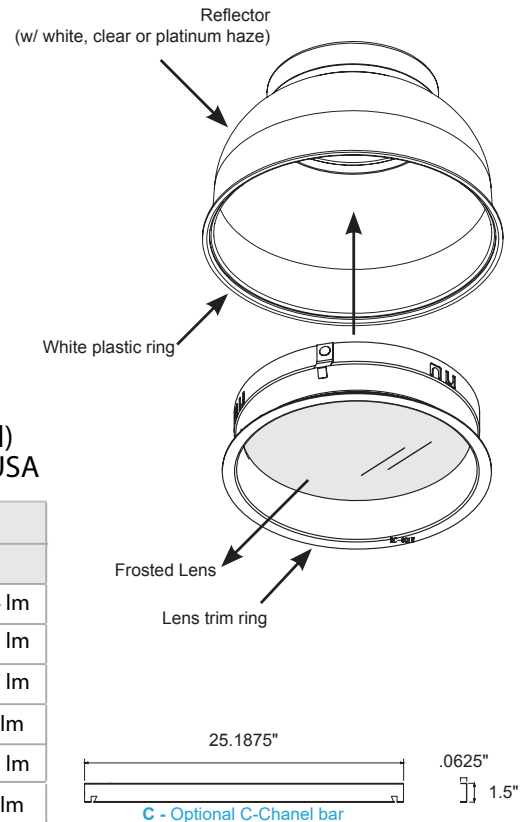


COLOR	CCT / Dominant Wavelength Range		Lumen Output		
	Maximum	Minimum	LO	MD	HI
3000K	2800K	3200K	1287 lm	1741 lm	2284 lm
4000K	3800K	4200K	1377 lm	1863 lm	2443 lm
5000K	4800K	5200K	1422 lm	1928 lm	2537 lm
RED	615nm	630nm	279 lm	373 lm	483 lm
GREEN	550nm	560nm	1872 lm	2540 lm	3351 lm
BLUE	450nm	455nm	378 lm	486 lm	605 lm
AMBER	585nm	595nm	1116 lm	1512 lm	2007 lm

ORDERING INFORMATION Example: (14134-4-LO-RGBW3K-A-WH-WH)


Model	Size	Lumen Output	Color Temperature	Frame	Trim	Reflector	Options
14134	4 Four inch	LO Low 25W	RGBW3K RGBW + 3000K	A Architectural	WH White Trim	WH White	C C-Channel Bar
	6 Six inch	MD Medium 35W	RGBW4K RGBW + 4000K	C Commercial	BK Black Trim	CL Clear	
	8 Eight inch	HI High 50W	RGBW5K RGBW + 5000K	RGBA RGB + Amber		PLH Platinum Haze	




ARCHITECTURAL FRAME DIMENSIONS

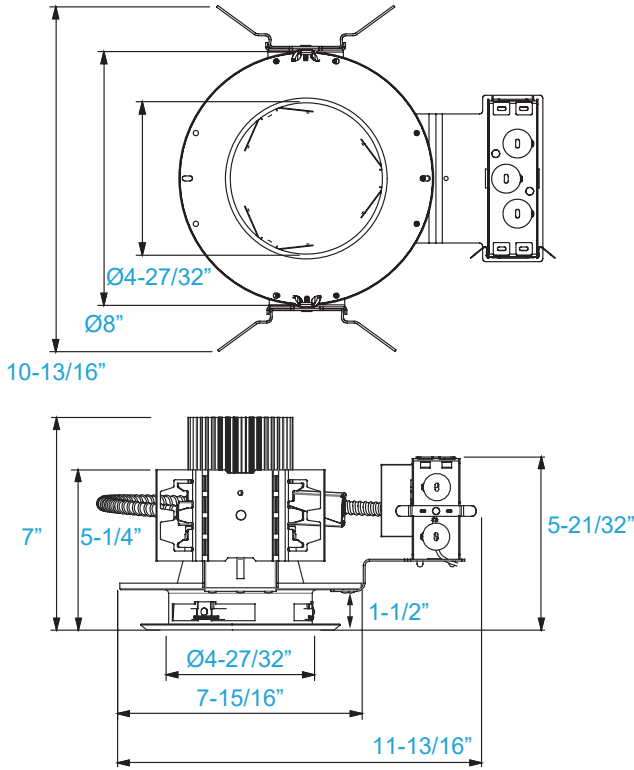

14134-4 | 4 Inch Architectural Frame




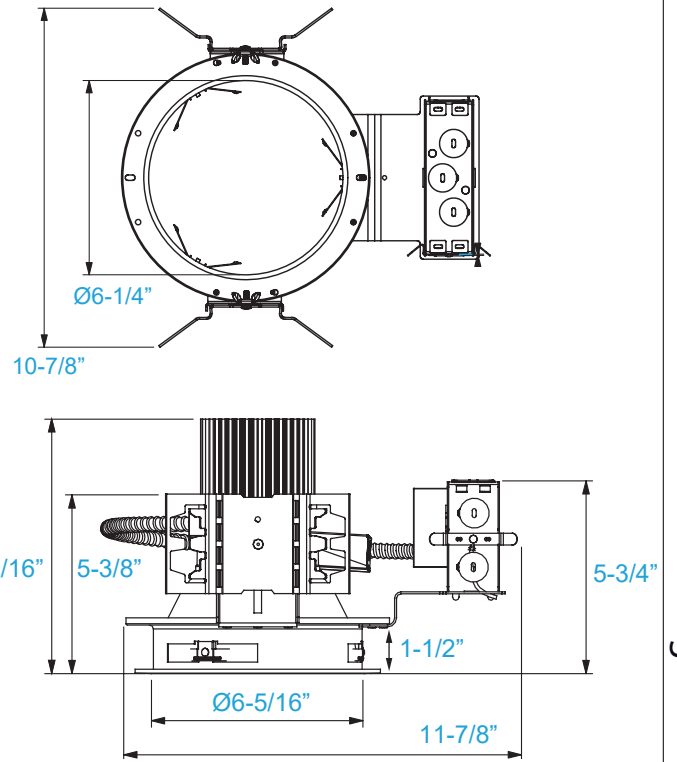


14134-6 | 6 Inch Architectural Frame

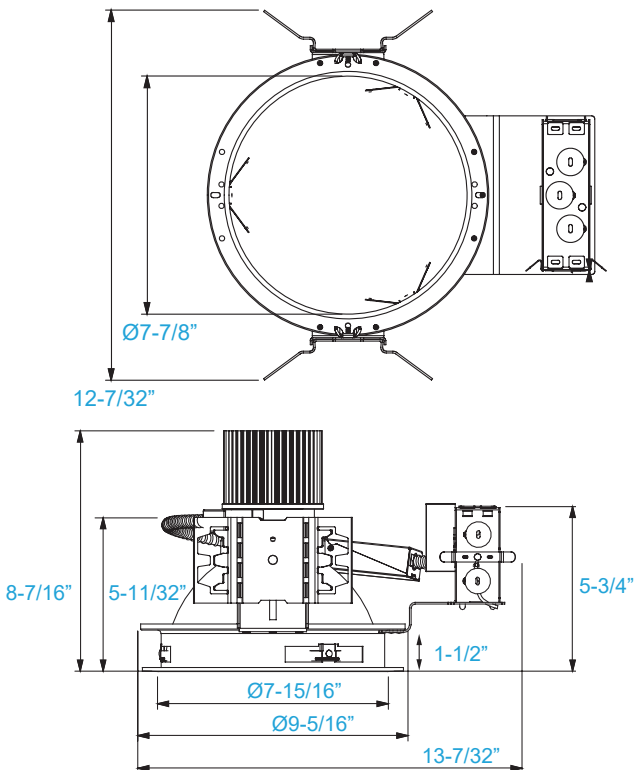



14134-8 | 8 Inch Architectural Frame

COMMERCIAL FRAME DIMENSIONS

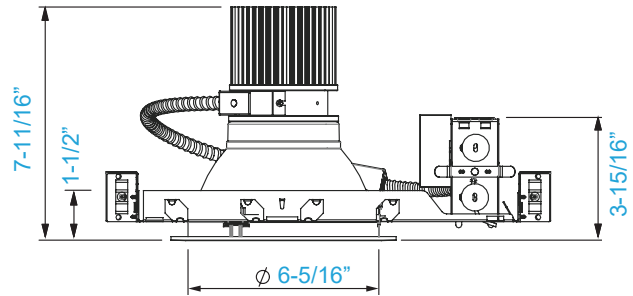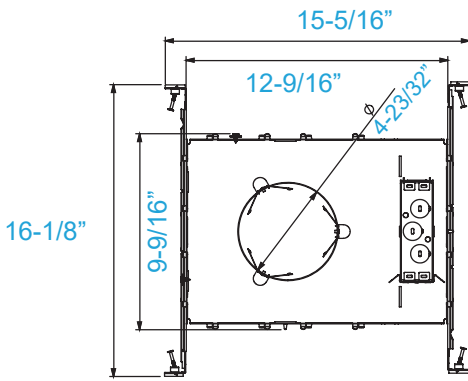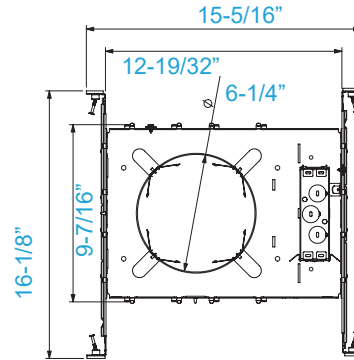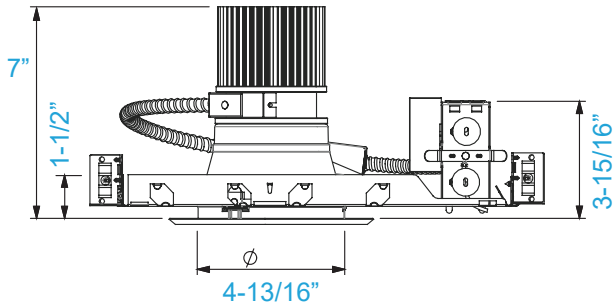

14134-4 | 4 Inch Commercial Frame

14134-6 | 6 Inch Commercial Frame

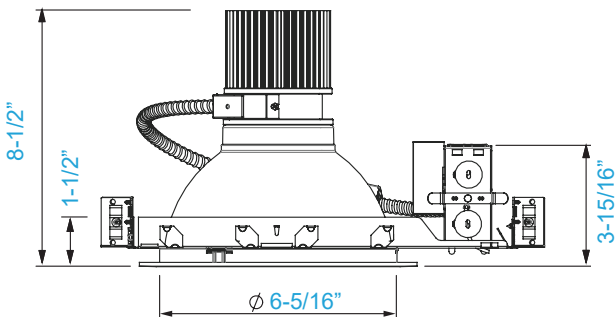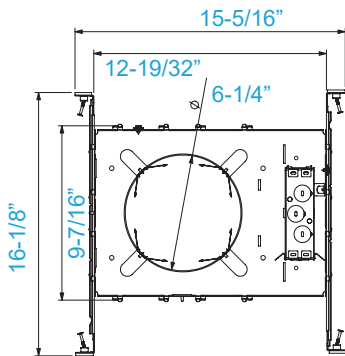

14134-8 | 8 Inch Commercial Frame