

**FIXTURE SPECIFICATIONS**

**INTENDED USE**

Alcon Lighting 14140 Architectural Linear LED In-Ground Drive-Over Rated Stainless Steel Wall Wash Outdoor Well Light In-grade linear uplight offers multiple beam angle options including symmetric and asymmetric optic. This product is suited ideally for in-ground/recessed installations in concrete or lawns for wall wash and ground mounted signs and linear objects.


**FEATURES**

- Construction:** Extruded Anodized Aluminum. Die-Cast Aluminum End Caps.
- Housing:** Concrete pour box can be shipped separately
- Lens:** Tempered Glass
- Input Voltage:** 120-277V AC  
Fixture Provided with 2 Foot 18 Gauge Lead Wire
- Ambient Operating Temperature:** -4°F (-20°C) ~ 113°F (45°C)
- Life:** 50,000 Hours
- Listings:** cETus, IP67
- Warranty:** 5 Years Carefree for Parts & Components (Labor Not Included)




*Housing in Stock. LED Component ships in 2-4 Weeks.*

**BEAM SPREAD**

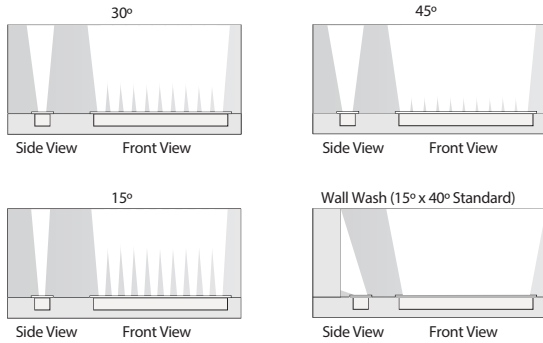

**DIMENSIONS**

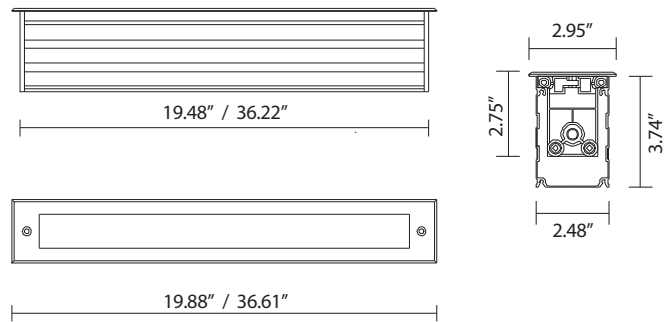

**ORDERING INFORMATION** Example: (14140-19-30K-4015-010)

Model	Length   Wattage   Lumens	Color Temperature	Beam Spread	Control
<b>14140</b>	<b>19</b> 19"   12W   1320 Lumens	<b>30K</b> 3000K	<b>1540</b> 15° x 40° <small>Standard</small>	<b>(Blank)</b> No Dimming
	<b>36</b> 36"   24W   2640 Lumens	<b>40K</b> 4000K	<b>6010</b> 60° x 10°	<b>010</b> 0-10V Dimming
		<b>50K</b> 5000K	<small>Symmetric Optic</small>	
			<b>5</b> 5°	
			<b>15</b> 15°	
			<b>25</b> 25°	
			<b>45</b> 45°	
			<b>60</b> 60°	