

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

This energy-efficient LED product may be used for a variety of residential and commercial spaces. Our recessed, trimless downlighting features a 30° beam angle. The architectural-grade, damp location-approved light includes a range of color temperatures, making the three-inch product perfect for a variety of projects.

PRODUCT FAMILY

14143-R | 3-Inch Trimless Round

14143-S | 3-Inch Trimless Square

ADDITIONAL FEATURES

Construction: Type IC-rated, no housing required. Die-cast aluminum with white powder-coat finish. Junction box included with products.

Beam Angle: 24°

CRI: 90

Dimming: Dimmable down to 10% with a standard TRIAC driver

Operating Temperature: 104° maximum

Voltage: 120VAC

Lumens: 700 lm - Up to 70 lumens per watt

Wattage: 10W

Color Temperature Switch: Capable of switching from 27K-50K color temperatures.

Life-span: 50,000 hours

Listing: ETL, JA8/Title 24, Energy Star, Rohs, Damp-location suitable


Warranty: 5 years carefree for parts and components (labor not included).




Trimless Round



Trimless Square

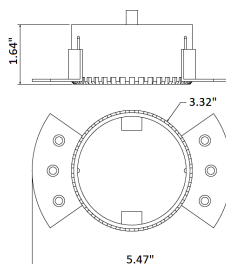

Trimless Round

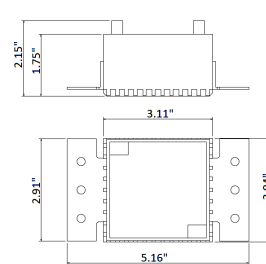


Trimless Square



ORDERING INFORMATION Example: (14143-R-WH)

Model	Shape	Finish	Options
14143	R Round	WH White	FL Frosted Lens
	S Square	BK Black	3EC ¹ 3 FT Extension Cord
		CL Clear	
		MG Matte Gold	
		MSL Matte Silver	

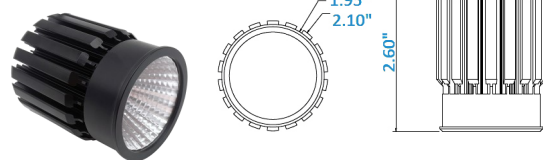

LED Engine



Junction Box included with fixtures

¹ This accessory offers easier installation

COLOR TEMPERATURE GUIDE

