

FIXTURE SPECIFICATIONS

INTENDED USE

Our lightbar yields intelligent lighting for commercial-grade wall wash lightbar residential and commercial purposes, providing cove and accent lighting with high lumens output. The damp-listed light features the ability to dim.

FEATURES

Construction: Cold rolled steel housing

Finish: Matte white

Voltage: 120-277V, 50/60 Hz

Dimming: 0-10V Dimming to 10%


Power Factor: typical > 0.95, THD <20, meets Class1 or Class2 circuit.

Life: 54,000 hours

Operating Temperature: -4°F (-20°C) ~ 122°F (50°C)

Warranty: Standard 5 years carefree for parts & components (Labor not included)

Listing: cULus listed, Suitable for damp locations, EM options are CEC Compliant

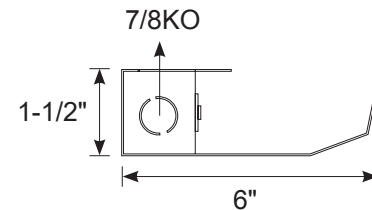

ORDERING INFORMATION Example: (14222-22-18-27K-80)

Model	Length Wattage Lumen	Color Temp	CRI	Options
14222	22-18	27K	80 ^{Standard}	EM4 ¹
	22 Inch 18 Watts 1696 lms	2700K	80+ CRI	4W CEC compliant EM Battery Backup
	22-27	30K	90	EM10 ¹
	22 Inch 27 Watts 2573 lms	3000K	90+ CRI	10W CEC compliant EM Battery Backup
	34-18	35K		
	34 Inch 18 Watts 1696 lms	3500K		
	34-27	40K ^{Standard}		
	34 Inch 27 Watts 2573 lms	4000K		
	46-18	50K		
	46 Inch 18 Watts 1696 lms	5000K		
	46-27			
	46 Inch 27 Watts 2573 lms			
	46-36			
	46 Inch 36 Watts 3450 lms			

¹ Not available for 22 Inch option