

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

This 180-degree lightbar features an adjustable hinge for commercial and residential specifications. With high lumens output and a 90-plus Color Rendering Index (CRI), the architectural-grade light affords refined cove and accent wall wash lighting.

FEATURES

Lens: Clear Polycarbonate

Power Factor: typical > 0.95, THD <20, meets Class 1 or Class 2 circuit.

Life: 54,000 hours


CRI: 90+

Operating Temperature: -4°F (-20°C) ~ 122°F (50°C)

Warranty: Standard 5 years carefree for parts & components (Labor not included)

Listing: cULus listed, Suitable for damp locations, EM options are CEC Compliant

Includes 120" hardwire cable for power.

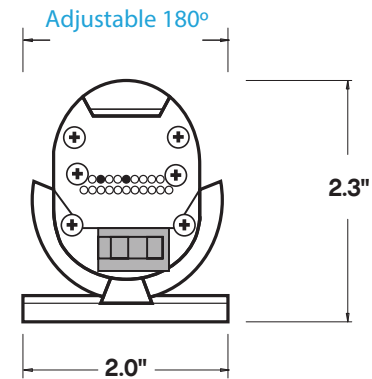

Alcon 14223 Adjustable Wall Wash Grazer LED Lightbar

ORDERING INFORMATION Example: (14223-1-22K-1-120)

Model	Length Wattage Lumen	Color Temp	Optics	Voltage Dimming	Options
14223	1 1 Foot 12 Watt 1056 Lumen	22K 2200K	1 30° x 60° (Wall Wash)	120 120V TRIAC Dimming	12LC 12" Link Cable
	4 4 Foot 48 Watt 4224 Lumen	25K 2500K	2 10° x 60° (Wall Grazing <15 feet)	120/277 120/277V 0-10V Dimming	60LC 60" Link Cable
		27K 2700K	3 10° x 10° (Wall Grazing >15 feet)		
		30K 3000K			
		35K 3500K			
		40K 4000K			
		50K 5000K			



1 Not available for 22 Inch option