

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

The specification-grade Oculare Architectural LED Multiple Recessed Lighting System is ideal for retail and commercial recessed can light applications. Recessed multiple lights are available in one, two, and three lamp linear configurations and features specifiable beam spreads.

FEATURES

Construction: 0.35" thick galvanized steel with louver-type ventilation

Installation: Universal brackets accept 25" C-channel bar hangers, 27" flat bar hangers, 24-1/2" bar hangers with captive nails, or simple rigid 1/2" steel conduit for tie down to ceiling grids; Mud ring included

Minimum Clearance: 3" from thermal insulation; 1/2" from any adjacent building components

Ceiling Cutout: 1-head: 8-1/2" x 8-1/2"; 2-head: 17" x 8-1/2"; 3-head: 22-1/2" x 8-1/2"


Adjustability: 360° horizontal and 35° vertical. Each head can be adjusted individually

CRI: 90+


Operating Temperature: -32°F (0°C) - 113°F (45°C)

Warranty: 5 years carefree for parts & components (labor not included)

Listings: cULus listed for damp locations

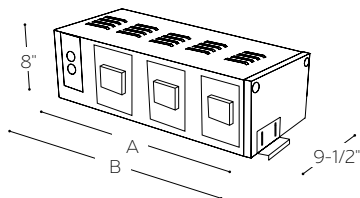

Dimensions	Length (A)	Length w/ Trim (B)	Ceiling Cut-Out
1 Head	9-1/2"	10-1/2"	8-1/2" x 8-1/2"
2 Head	18"	19"	17" x 8-1/2"
3 Head	23-1/2"	24-1/2"	22-1/2" x 8-1/2"

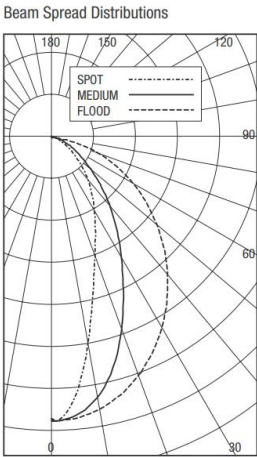

ORDERING INFORMATION Example: (14300-1-RE-D15-27K-SP-BW-D10-1)

Model	Heads	Design	Wattage Lumens	Color Temp	Beam Spread	Trim Finish	Driver
14300	1 1 Head	RE Regressive Face	D15 15 Watts 900 Lumens	Residential 27K 2700K	SP Spot	BW Black Face White Flange	D10-1 120V; 0 -10V (100 - 1%)/ELV/TRIAC
	2 2 Heads	FF Flat Face	D18 18 Watts 1500 Lumens	30K 3000K	NF Narrow Flood	SS Silver Face Silver Flange	D10-2 120-277V; 0 -10V (100 - 1%)
	3 3 Heads		D30 30 Watts 2500 Lumens	Commercial 35K 3500K	FL Flood	WW White Face White Flange	
				40K 4000K			