

## FIXTURE SPECIFICATIONS

### INTENDED USE

The specification grade **Crystalline Series LED Architectural LED Troffer** delivers a sleek, low profile, low glare, direct ambient light perfect for today's commercial buildings. This unique, squared lens, combined with our high reflectance, ensures a highly efficient and superior quality lighting fixture.

### AVAILABLE LENGTHS

**1'x4'** | W 12" x L 48" x H 3.34"

**2'x2'** | W 24" x L 24" x H 3.36"

**2'x4'** | W 24" x L 48" x H 3.26"

### FEATURES

**Construction:** Volumetric Center Lens, Formed and Welded 24-Gauge Steel

**Finish:** Post Powder Painted, Matte White Finish with 92% Reflectance

**Lens:** Glare Free Snap In Frosted Acrylic for Even Distribution

**Dimming:** 5-Wire 0-10V (100%-10%)

**Voltage:** 120-277V (50/60 Hz) Constant Current

**CRI:** >80

**Life:** 60,000 Hours


**Warranty:** 5 Years Carefree for Parts & Components (Labor Not Included)

**Listings:** CA Title 24 Compliant, cETL Listed, LED Chips Tested to LM-80 Standards




### END VIEWS


**1'x4'**

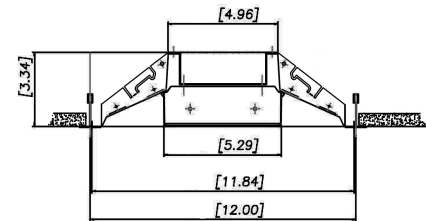

**2'x2'**

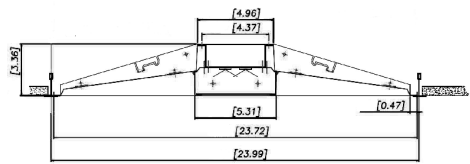

**2'x4'**

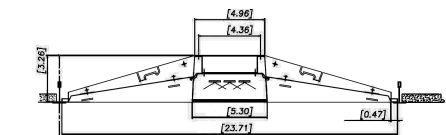

## ORDERING INFORMATION Example: (17100-14-69L-35K-GR-OS)

Model	Size	Lumens   Wattage	Color Temp.	Mounting	Options	
<b>14726</b>	<b>14</b> 1' x 4'	<b>45L</b> 4500 Lumens   37 Watts	<b>30K</b> 3000K	<b>GR</b> (Grid) T-Bar <b>FL</b> (Flange) Drywall	<b>EM</b> Remote Emergency Backup Battery 90 min <b>OS</b> Occupancy Sensor	
		<b>69L</b> 6900 Lumens   57 Watts	<b>35K</b> 3500K			
		<b>27L</b> 2700 Lumens   22 Watts	<b>40K</b> 4000K			
	<b>22</b> 2' x 2'	<b>37L</b> 3700 Lumens   30 Watts	<b>50K</b> 5000K			
		<b>24</b> 2' x 4'	<b>57L</b> 5700 Lumens   46 Watts			
			<b>69L</b> 6900 Lumens   57 Watts			