

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

Available in a range of lumen outputs and voltage options, this architectural-grade LED troffer product furnishes a low, sleek aesthetic and is available as a 2ft by 2ft and 2ft by 4ft. Our ambient, low-glare LED troffer is designed for today's smart lighting commercial buildings. The uniquely frosted and squared lens, combined with high reflectance and recessed, flanged, T-grid lay-in mounting, assures stylishly efficient and quality lighting.

AVAILABLE SIZES

2x2 | W 23.7" x L 23.7" x H 3.1"
 2x4 | W 23.7" x L 47.8" x H 3.1"

FEATURES

Construction: Solid die-formed cold-rolled steel with a reflective powder-coated interior, baked post-fabrication for a high-gloss finish.

Lens: Glare-free in frosted acrylic for even distribution

Color Temperature: 35/40/50K Selectable switch

Dimming: 1-10V continuous dimming comes standard

Voltage: 120-277V

CRI: >80

Life: 70,000 Hours

Listings: cULus listed, DLC Premium listed

Warranty: 5 years carefree for parts & components (Labor not included)



| Size | Wattage | Lumens |
|------|------------|-------------------|
| 2x2 | 20/25/35 W | 2500/3125/4375 lm |
| 2x4 | 28/36/46 W | 3500/4500/5750 lm |




ORDERING INFORMATION Example:

| Model | Size | Trim Type | Options |
|-------|------------------|--|--|
| 14726 | 22 23.7" x 23.7" | GR | EM10 1000 lumens Emergency Backup Battery EM18 1800 lumens Emergency Backup Battery |
| | 24 23.7" x 47.8" | Grid (T-Bar) FK Flange (Drywall) | |

Alcon 14726 Crystalline Series Recessed Troffer LED Downlight

DIMENSIONS

2x2

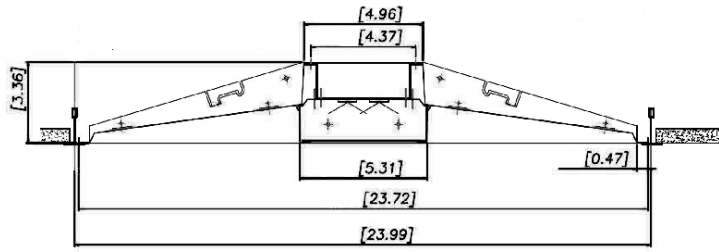

2x4

