roject Name:	Type:	Quantity:

#### **INTENDED USE**

Available in a range of lumen outputs and voltage options, this architectural-grade LED troffer product furnishes a low, sleek aesthetic and is available as a 2ft by 2ft and 2ft by 4ft. Our ambient, low-glare LED troffer is designed for today's smart lighting commercial buildings. The uniquely frosted and squared lens, combined with high reflectance and recessed, flanged, T-grid lay-in mounting, assures stylishly efficient and quality lighting.

#### **AVAILABLE SIZES**

2x2 | W 23.7" x L 23.7" x H 3.1" 2x4 | W 23.7" x L 47.8" x H 3.1"

### **FEATURES**

Construction: Solid die-formed cold-rolled steel with a reflective powder-coated interior, baked post-fabrication for a high-gloss finish.

Lens: Glare-free in frosted acrylic for even distribution

Color Temperature: 35/40/50K Selectable switch Dimming: 1-10V continuous dimming comes standard

Voltage: 120-277V

CRI: >80

Life: 70,000 Hours

Listings: cULus listed, DLC Premium listed

Warranty: 5 years carefree for parts & components

(Labor not included)

Size	Wattage	Lumens	
2x2	20/25/35 W	2500/3125/4375 lm	
2x4	28/36/46 W	3500/4500/5750 lm	
















# **ORDERING INFORMATION Example:**

Model	Size	Trim Type		Options
14726	22 23.7" x 23.7" 24 23.7" x 47.8"	GR Grid (T-Bar) FK Flange (Drywall)	EM8	8W Emergency Backup Battery with integrated self-diagnostics and an LECP flat test switch 15W Emergency Backup Battery with integrated self-diagnostics and an LECP flat test switch




## **DIMENSIONS**

14726-22





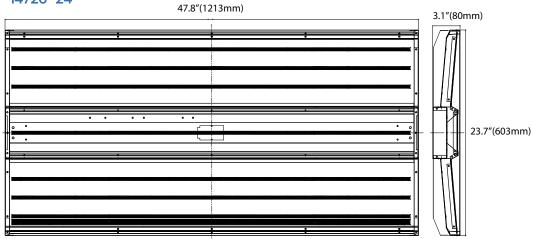

# **OPTICS**

## Beam Angle 110°x110°

