









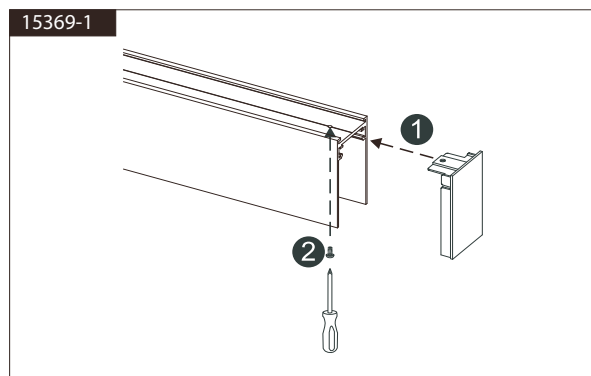
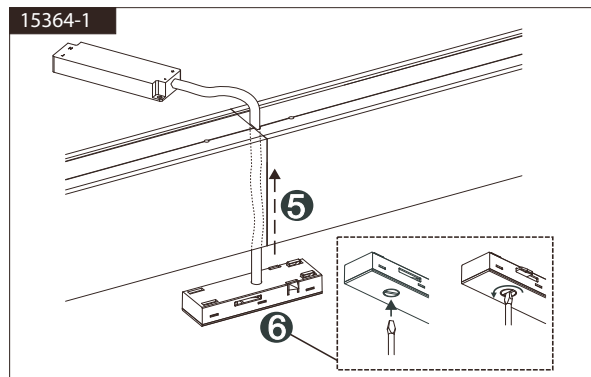
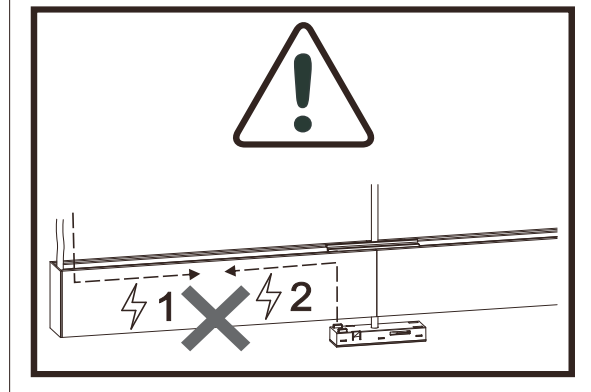
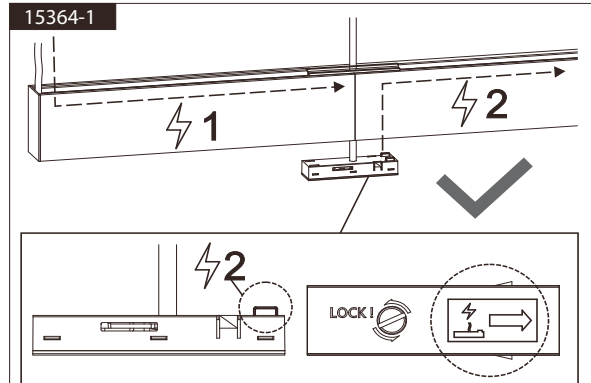
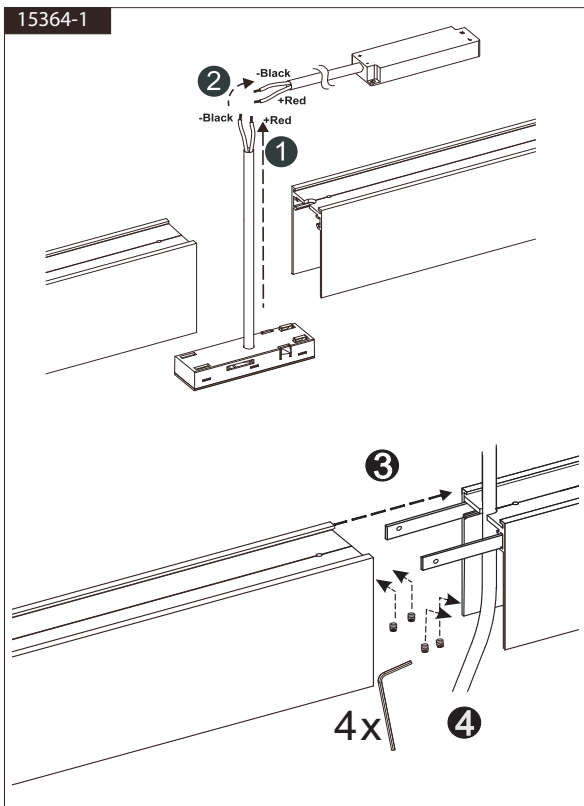
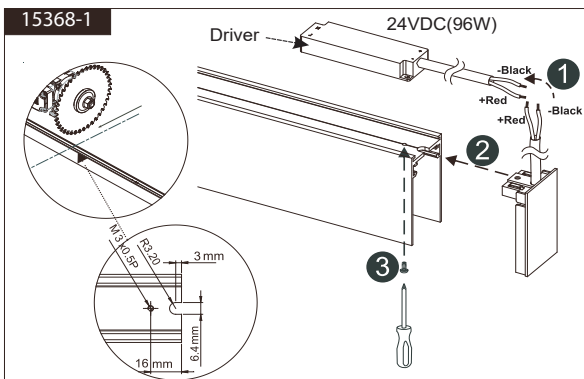
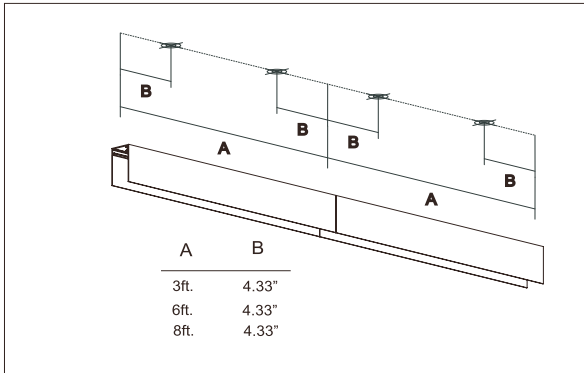










## FIXTURE SPECIFICATIONS

SURFACE MOUNT + PENDANT TRACK		number	L
		15100-P/S-S-3	3ft.
		15100-P/S-S-6	6ft.
		15100-P/S-S-8	8ft.
ACCESSORIES			
			
Horizontal corner L-shaped connector	15361-1 (for pendant) 15362-1 (for surface mount) Circuit joint	15368-1 End cap with power cord	15797-012 Pendant kit
			
Vertical corner L-shaped connector	15363-1 (for pendant) 15364-1 (for surface mount) Power joint	15370-01 End cap without power cord	15796-015 Pendant kit with canopy
			15795-015 Surface mounted clip






## SURFACE MOUNT INSTALLATION



## SURFACE MOUNT INSTALLATION

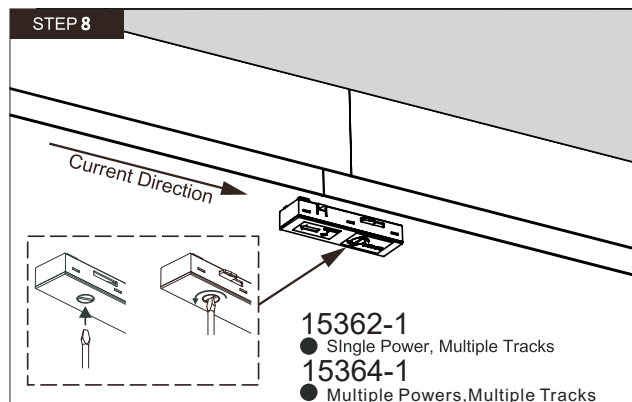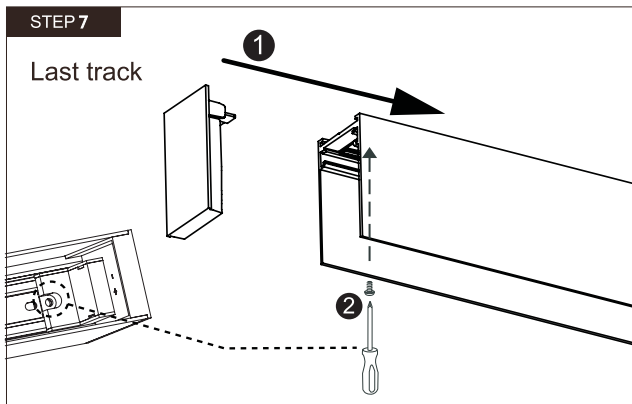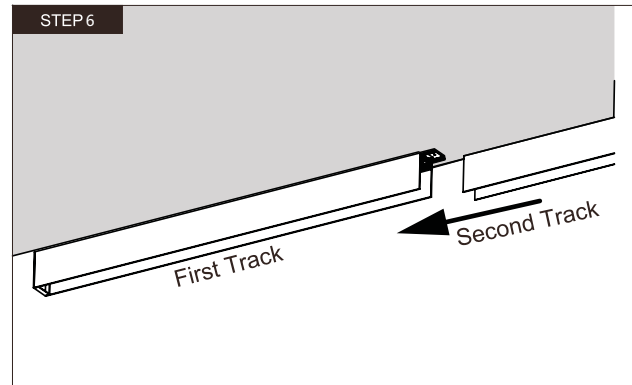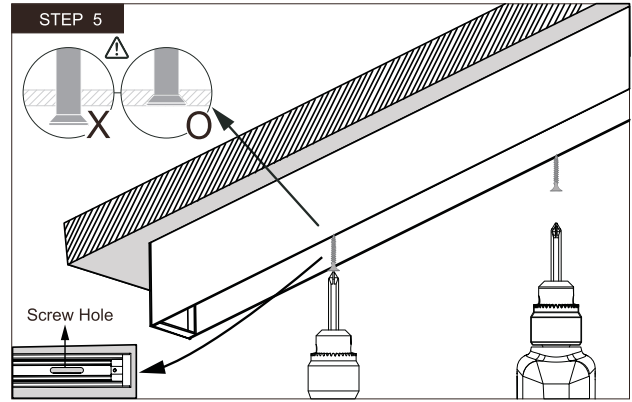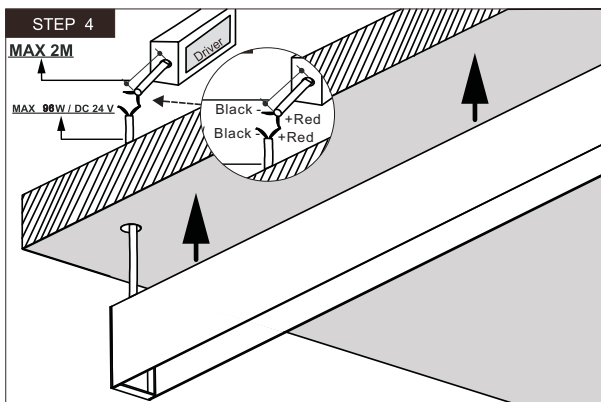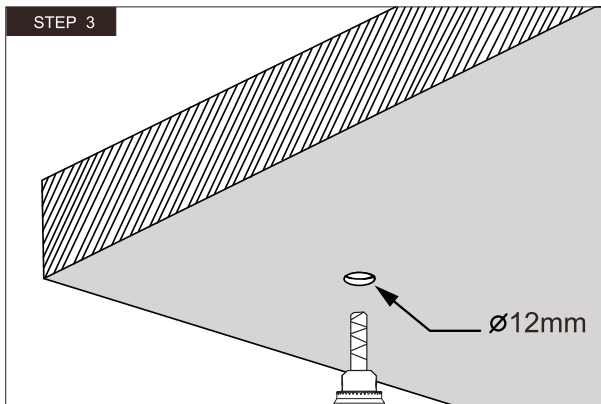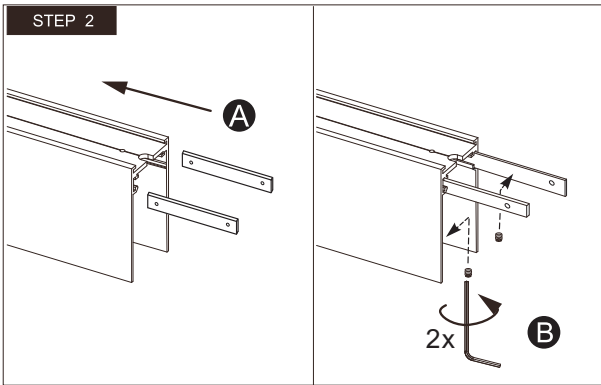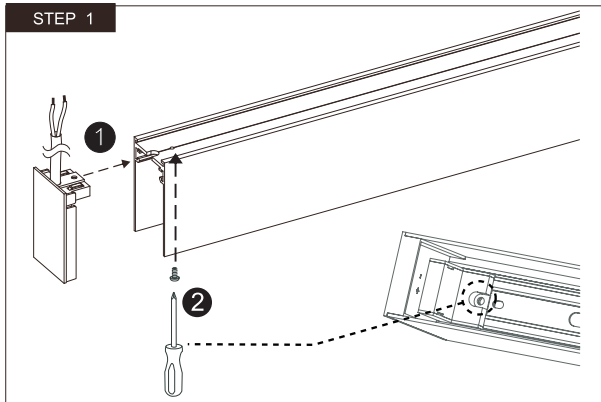


## PENDANT INSTALLATION

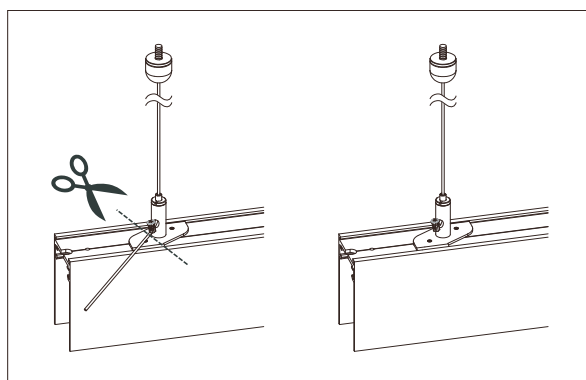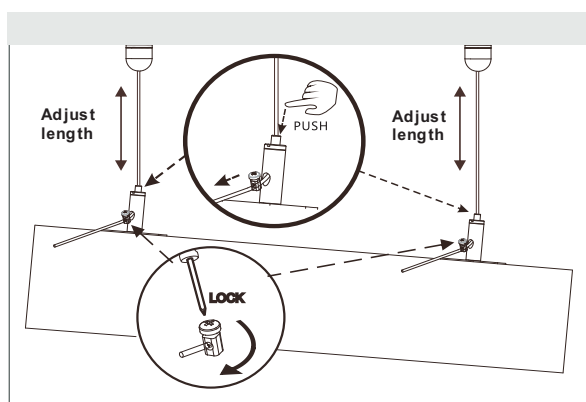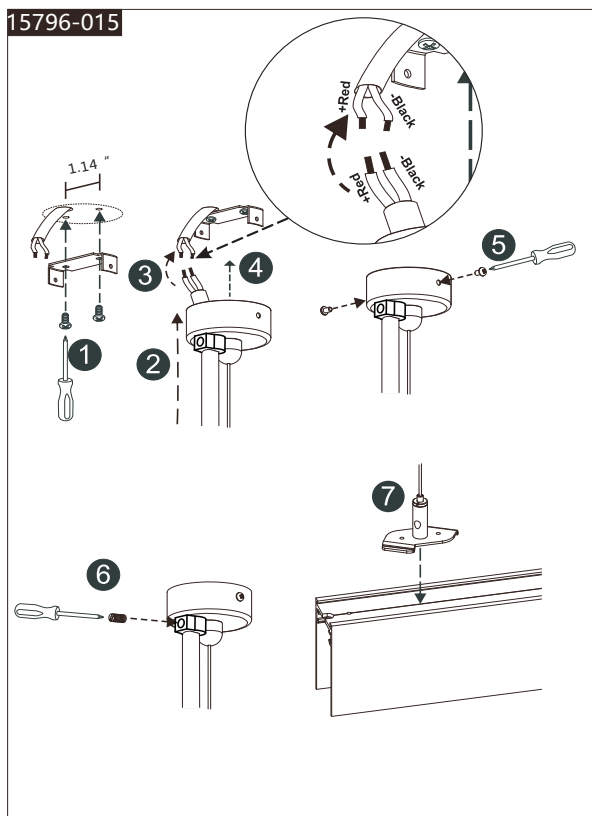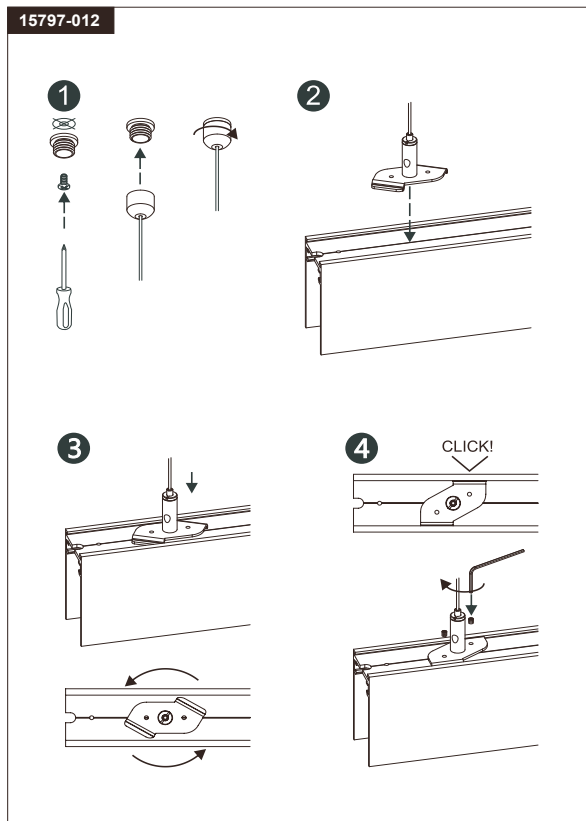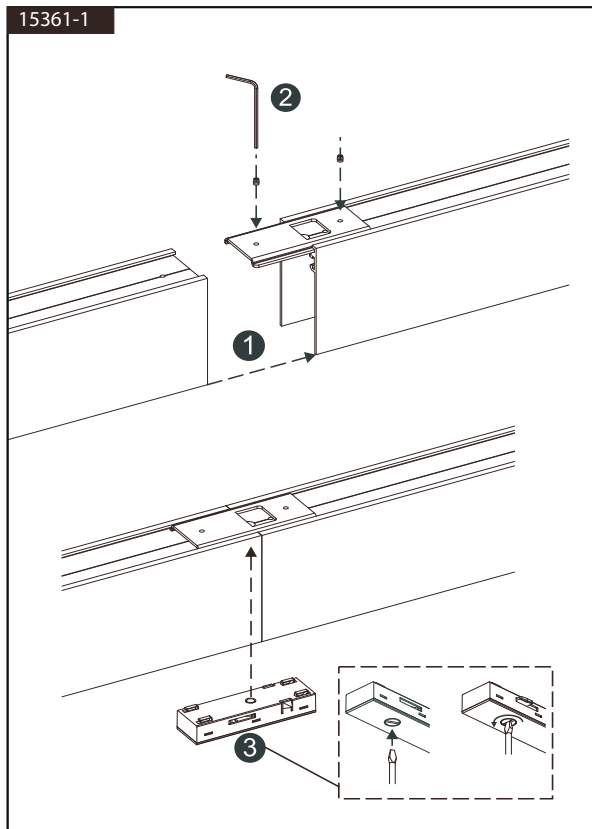

## APPLICATION INSTALLATION


### ⚠ Calculate Cable Length

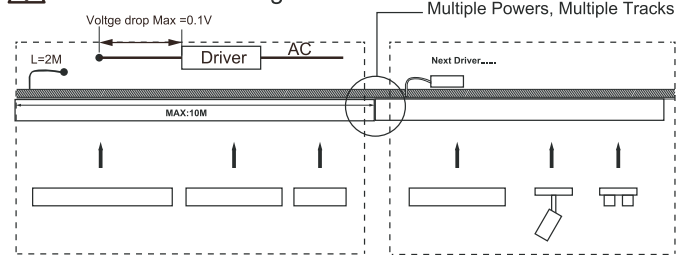

#### NOTE:


1. Max wattage linkable per loop for 24VDC is 96W.
2. Max length of track linkable per loop is 10M, and the max cable length between driver and track is 2M.
3. Dimming modules are compatible to PWM dimming driver only.
4. To use drivers not on recommended list, it require compatibility test before installation.
5. Tracks allows continuous linkable without limitation, also can divide into sections to light up individual area, making lighting application easy as 123.
6. Minimum voltage per loop is 22VDC (measure at the end of the loop), under 22VDC per loop might cause abnormal.
7. Calculating max wattage connection, save 20% buffer for linear modules, and 25% buffer for other modules.
8. Use driver not in the recommended list might cause module flickering, unstable dimming and/or noise, even causing module failure.
9. When multiple drivers are use in the connection, make sure the connector without circuit is used to divide the loop.
10. When installation tracks (pipes), make sure measuring the voltage from 15364-1 & 15368-1 / 15369-01 with the driver connected first, without modules, to see if the voltage is 24VDC, then measure the track & 15364-1 & 15368-1 / 15369-01 to see if the voltage drop is 0.1V, if the voltage drop is over 0.1V, make sure the connector is secured properly, warpage is not allowed in the connection, also check the cleanliness of the copper connector, copper connector can be cleaned using alcohol.

### ① Single Power, Single Track

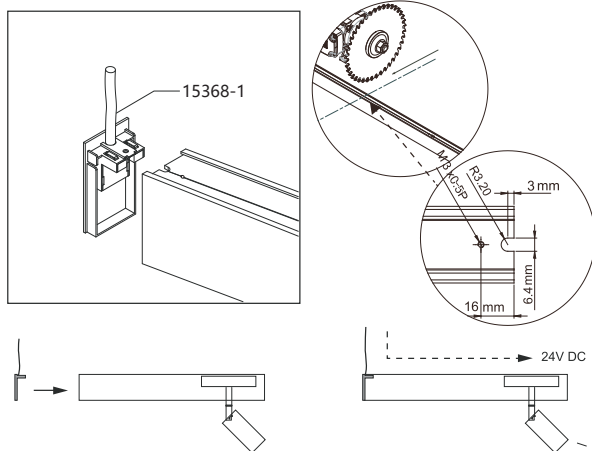

Using power end cap (15368-1) as power feed

### ② Single Power, Multiple Tracks

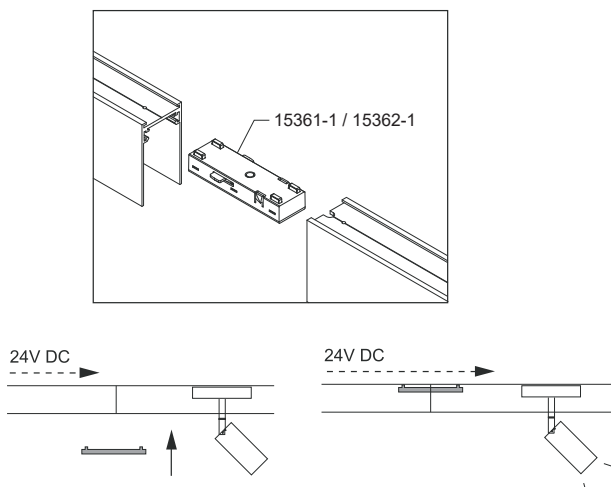

Using circuit joint (15361-1 / 15362-1) to connect between tracks

### ③ Multiple Powers, Multiple Tracks

