

FIXTURE SPECIFICATIONS

INTENDED USE

The specification grade **Hobart Architectural LED High and Low Bay Pendant** provides high CRI increasing the light quality of a space and improving visibility, thus reducing the chance of accidents. The Hobart is an ideal option for commercial applications and interior spaces looking for bright and efficient lighting.

FEATURES

Construction: Spun Matte Anodized .063 Aluminum Housing

Mounting: 6FT Adjustable Aircraft Cable/Power Cord

Canopy: Mounts to Standard J-Boxes

Lens: Frosted 3/16" Tempered, Soda Lime Glass with 2" Ventilation

Gasket: Rubber

Driver: Constant Current

Voltage: 120V/277V

Wattage: 56W

Lumens: 5850 lms

Dimming: 5-Wire 0-10V Dimming 100%-10%


CRI: 87

Efficacy: 66.68

Listings: cUL Listed for Dry Location Only



15203 shown with EM option

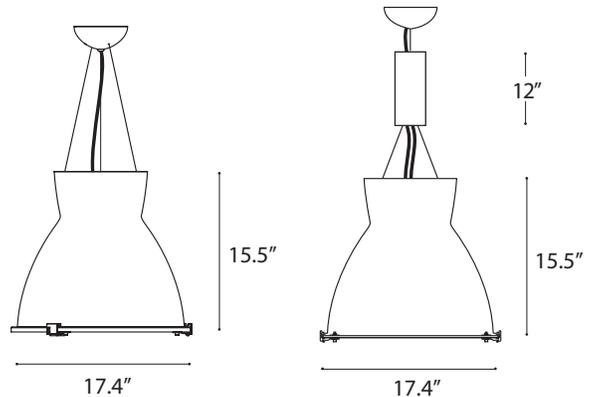

ORDERING INFORMATION Example: (15203-AN-30K)

Model	Finish	Color Temp	Options
15203	AN Anodized	30K 3000K	EM¹ Emergency Backup Battery 10 watts 3558 lumens
	WH White	35K 3500K	
	BK Black	40K 4000K	

¹Emergency Operation for 90 Minutes

COMPATIBLE DIMMERS

			
0-10 V	2100 2101 2102	Diva DDTV	IP-710-DL

COLOR TEMPERATURE GUIDE



<p>2700K</p> <p>WARM WHITE</p> <p>friendly personal intimate</p> <p>HOMES LIBRARIES RESTAURANTS</p> <p>X</p>	<p>3000K</p> <p>SOFT WHITE GLOW</p> <p>soft warm pleasing</p> <p>HOMES HOTEL ROOMS LOBBIES RETAIL STORES</p> <p>✓</p>	<p>3500K</p> <p>NEUTRAL GLOW</p> <p>sociable inviting non-threatening</p> <p>EXECUTIVE OFFICES RECEPTION AREAS SUPERMARKETS</p> <p>✓</p>	<p>4000K</p> <p>COOL WHITE GLOW</p> <p>neat clean efficient</p> <p>OFFICES CLASSROOMS MASS MERCHANDISERS SHOWROOMS</p> <p>✓</p>	<p>5000K</p> <p>DAYLIGHT GLOW</p> <p>bright cool alert</p> <p>GRAPHICS INDUSTRY HOSPITALS GALLERIES BEAUTY SALONS</p> <p>X</p>
---	--	---	--	---