
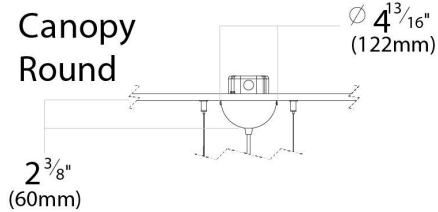
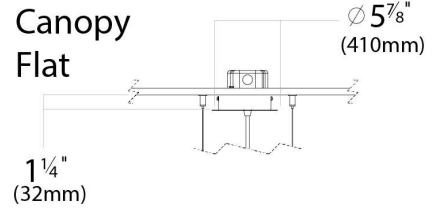


SHOP NOW >

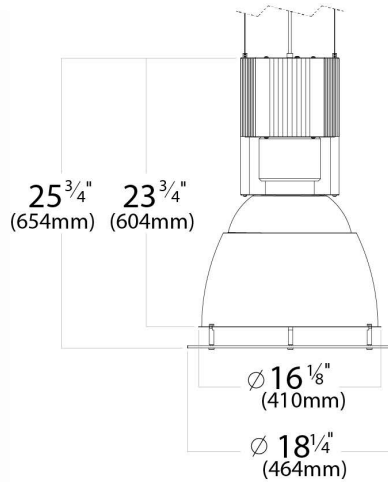

## FIXTURE SPECIFICATIONS

### INTENDED USE

The **Alta Architectural Commercial LED Low Bay Pendant Mount Direct Down Light** features a minimalistic design and high quality ambient illumination. The Alta is an ideal lighting option for most commercial spaces.

### FEATURES

- Construction:** Premium Matte Silver Extruded Aluminum with Spun Aluminum Ring
- Heat Sink:** Forged and Extruded Heat Sink with Pressed Copper Heat Pipes and Dual Phase Cooling Technology™
- Lens:** White Frosted Glass Dome
- Mounting:** 4" Solid Square Fixture Hanger Attached Over 4" Octagonal Junction Box  
Aircraft Cables Anchored to Ceiling
- Canopy:** Spun Aluminum Canopy with Silver Finish
- Cord:** 96" Standard  
*Custom Length Available up to 120"*
- LED:** Cree® Chip-On-Board LED
- Binning:** 2-Step SDCM
- Optic:** Wide Flood
- Voltage:** 120-277, 50/60 Hz
- Dimming:** 0-10V Down to 5%
- Power Factor:** >0.9
- Total Harmonic Distortion:** <20%
- Life:** 50,000 Hours (L70)
- Max Ambient Operating Temperature:** 104°F (40°C)
- Warranty:** 5 Year Limited Warranty
- Listings:** ETL Listed  
Title 24 Compliant



## ORDERING INFORMATION Example: (15205-3-24W-27K-FC)

Model	Wattage & Lumens	Color Temp	Mounting	Options
<b>15205-3</b>	<b>24W<sup>1</sup></b> 23.7 watts   1500 lms	<b>27K</b> 2700K	<b>FC</b> Flat Canopy	<b>EM</b> Emergency Backup Battery
	<b>31W<sup>1</sup></b> 31 watts   2000 lms	<b>30K</b> 3000K		
	<b>44W<sup>1</sup></b> 43.8 watts   3000 lms	<b>35K</b> 3500K		
	<b>48W<sup>2</sup></b> 48.3 watts   4000 lms	<b>40K</b> 4000K		

<sup>1</sup> 90+ CRI  
<sup>2</sup> 80+ CRI