


Project Name: \_\_\_\_\_ Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

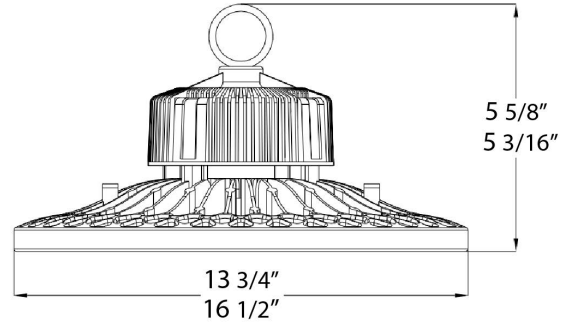

### FIXTURE SPECIFICATIONS

#### INTENDED USE

The **Roswell Architectural LED High Bay** features a European and American design style that produces better airflow, low heat resistance, and low decay long life. The Roswell is an excellent illumination option for warehouses, storage spaces, and other industrial and commercial applications.

#### AVAILABLE DIMENSIONS

**100W/150W** | Dia 13-3/4" x H 5-5/8"  
**200W/240W** | Dia 16-1/2" x H 5-13/16"

#### FEATURES

- Construction:** High quality aluminum die-cast, painting process, cracking prevention, and stainless steel rings vapor & water proof
- Shell Materials:** Aluminum alloy
- Heat Sink:** Mini copper core weal
- Mounting:** 49 FT Max  
*Safety hook included*
- Lens:** Low heat resistance, polycarbonate flat lens
- Beam Angle:** 120°
- Electrical:** SMD3030 LED chips
- Voltage:** 120-277V 50/60 Hz
- Lumen Efficiency:** 130 lm/W
- Color Temperature:** 5000K
- CRI:** 80+
- Power Factor:** >.95
- THD:** < 20%
- Surge Resistance:** 6000V
- Surge Current:** 65A
- Life:** 50,000 Hours
- Operating Temperature:** -40°F (-40°C) - 122°F (50°C)
- Warranty:** 5 Years
- Listings:** UL Certified for driver
- ETL Listed
- IP65 Rated
- RoHS
- Suitable for wet locations



### ORDERING INFORMATION Example: (15221-100W-110)

Model	Wattage & Lumens	Dimming	Options
<b>15221</b>	<b>100W</b> 100 watts   13000 lumens	<b>ND</b> Non-Dimming <b>010</b> 0-10V Dimming	<b>UL120</b> UL Standard Power Plug & Cord (120V / 59" / Black) <b>SSC</b> 304 Stainless Steel Chain (40") <b>IFS</b> Passive Infrared Sensor with Daylight Sensor
	<b>150W</b> 150 watts   19500 lumens		
	<b>200W</b> 200 watts   26000 lumens		
	<b>240W</b> 240 watts   31200 lumens		