

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

With a range of color temperature options and powered with over 10,000 lumens from 99 Watts, the 16-inch suspended pendant light—diecast in aluminum—is made with passive thermal management for silent, long-life operation. Dimmable with standard 0-10V controls, our product includes a variety of colored glass and aluminum shade choices for both residential and commercial as well as retail and institutional interiors.

FEATURES

Mount: 10ft suspension cable that can be adjusted in the field using the quick lock mechanisms found in the canopy

CRI: 90+

LED: Integral chip-on-board

Dimmable: 0-10V (10-100%)

Input Voltage: 120-277 VAC 50/60Hz

Lifetime: 50,000 hours at 77°F

Lumens: 103 lumens per watt, 10,200 lms

Wattage: 99W

Warranty: 5 years carefree for parts & components (labor not included)

Listings: cETLus listed for dry indoor environment, LM80 tested



ORDERING INFORMATION Example: (15245-16-CPR-30K)

Model	Shade Finish	Color Temp	
15245-16	CPR Standard	27K	2700K
	Clear Prismatic Polycarbonate Refractor	30K	3000K
	PC	35K	3500K
	Powder Coat Gray/White Interior	40K	4000K
	Aluminum Reflector		
	AMD		
	Amber Glass Diffuser		
	WHD		
	White Glass Diffuser		
	BUD		
	Cobalt Blue Glass Diffuser		



CPR
Clear Prismatic
Polycarbonate Refractor



WHD
White Glass Diffuser



BUD
Cobalt Blue Glass Diffuser




AMD
Amber Glass Diffuser




PC
Powder Coat Gray/
White Interior



Husk with
Integrated LED

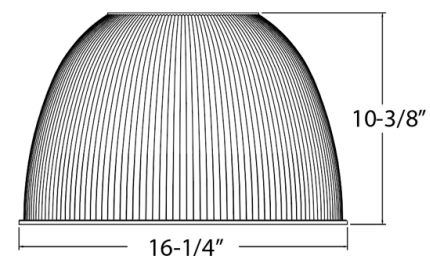

Prismatic polycarbonate
refractor shade (CPR)



Aircraft Cable Suspension

15245-16-CLR-30K

