

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

Today's residential or commercial space can gain from our anodized, low-profile aluminum architectural-grade cove LED light. Designed for ceiling or wall wash lighting applications, the wide beam distribution comes with a patented frosted diffuser for even distribution of light. This product is field-cuttable.

FEATURES

Mounting: Installs on surface/corners

Finish: Black, silver and custom finishes are available

Lens: Frosted

Voltage: 24V LED fixture, 120-277V Driver required for every 24' run.

Beam Spread: 160°

Lumens & Wattage:

Indoor: IP54 | 500 L/Ft | 5.5W/Ft

Outdoor: IP65 | 250 L/Ft | 3.0W/Ft


Operating Temperature: -40°F(-40°C)~+140°F(+60°C)

CRI: 95+

Life: 50,000

Warranty: 5 years carefree for parts & components.
(labor not included)

Listings: UL listed, Title 24/JA8, Indoor (IP54) or outdoor (IP65)

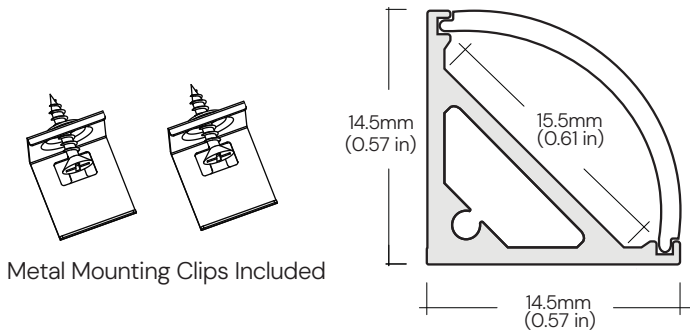

Metal Mounting Clips Included



ORDERING INFORMATION Example: (15255-CR-12-30K-BK-4N1-WL)

Model		Shape		Single Run		Color Temp		Finish		Dimming Driver		Options	
15255		S		Single Run		27K		SL		4N1		WL ¹	
		CR		Continuous Run		30K		BK		TRIAC, ELV, MLV & 0-10V Dimming		Wet Location IP65	
				Specify Run Length in Feet		35K		CS					
						40K							
						50K							


¹ Wet Location for LED component only

REMOTE DIMMING DRIVER SPECIFICATIONS


4N1SERIES

Compatible with most TRIAC, ELV, MLV & 0-10V Dimmers


4N1-30W-24V




4N1-60W-24V




4N1-96W-24V




4N1-150W-24V

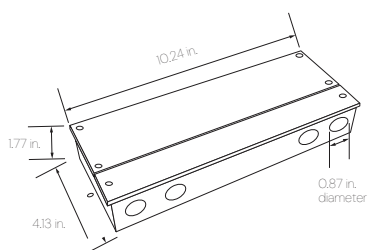

4N1-200W-24V

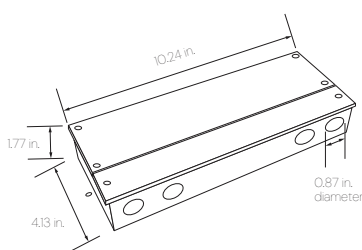

4N1-300W-24V

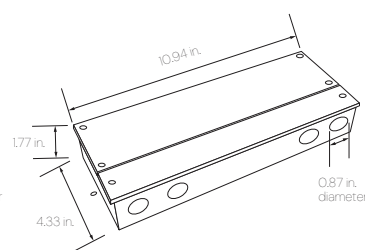

COLOR TEMPERATURE GUIDE

