

## FIXTURE SPECIFICATIONS

### INTENDED USE

Low-profile commercial-grade LED lighting finished in white, bronze or silver is perfect for apartment garage, gas station, entry or perimeter lighting. Our vandal-resistant canopy product includes a UV-stabilized, one-piece polycarbonate lens. Wattage, lumens output and color temperature varies. Higher voltage and custom finish also available.

### FEATURES

**Construction:** Powder coated aluminum housing

**Lumens:** 154 lm/W

**Voltage:** 120-277V

**CRI:** 75+




**Finish:** White, bronze & silver

**Dimming:** 0-10V

**Mounting:** Surface-mount

**Motion Sensor:** FSP-211 (see page 2) is optional

**Listings:** IP65, cULus, Buy American Act

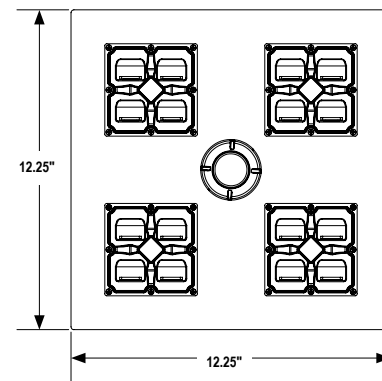


## ORDERING INFORMATION Example: (16000-35-40K-WH)

Model	Wattage   Lumens		Color Temp		Mounting		Finish		Options	
16000	35	35W   5270 lms	30K	3000K	BLANK	None	WH	White	EM	Emergency Backup Battery
	55	55W   7910 lms	35K	3500K	ST6	6" Stem	SL	Silver		
	75	75W   10200 lms	40K	4000K	ST8	8" Stem	BZ	Bronze		
			50K	5000K	ST12	12" Stem	CS	Custom	MS	Motion Sensor (see Pg2 for details)
					ST18	18" Stem				
					ST24	24" Stem				
					ST48	48" Stem				

## PHOTOMETRY


Model 35W 4000K

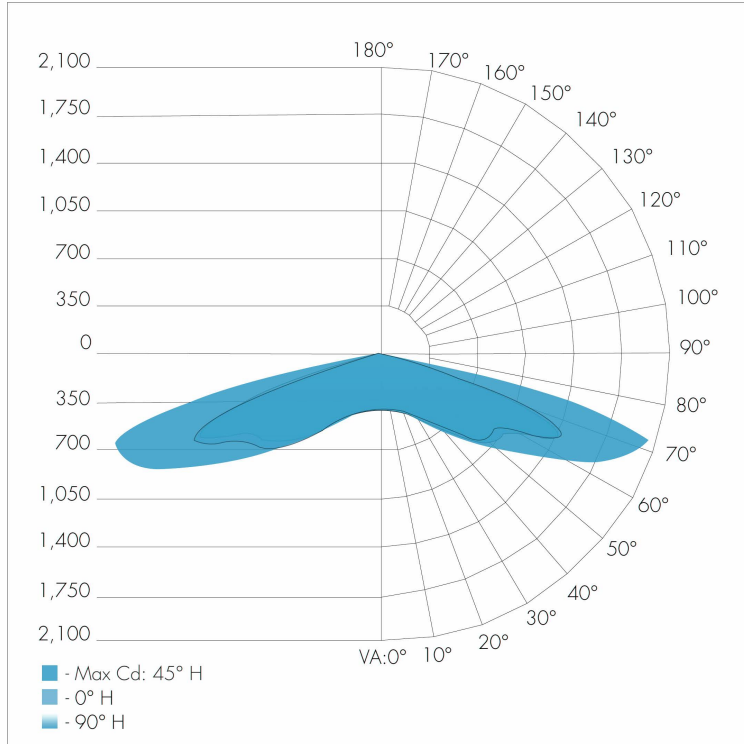

### Zonal Lumen Summary

Zone	Lumens	%Luminaire
0-30	377.0	7.2%
0-40	779.1	14.8%
0-60	2,545.5	48.3%
60-90	2,718.1	51.6%
70-100	1,155.9	21.9%
90-120	7.8	0.1%
0-90	5,271.4	99.9%
90-180	7.8	0.1%
0-180	5,271.4	100%

### Isofootcandle

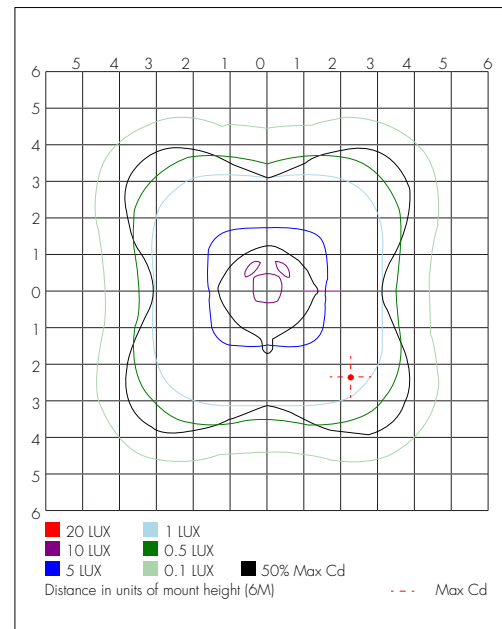

## MOTION SENSOR



The FSP-211 mounts in an outdoor lighting fixture and provides multi-level control based on motion. The sensor also includes a photocell to measure the ambient light level.

It controls 0-10 VDC LED drivers and with an FSP-LX Lens, is rated for wet and cold locations. All control parameters are adjustable via a wireless configuration tool capable of storing and transmitting sensor profiles.

### Key Factors:

- Full adjustable high and low dimmed light levels.
- Designed for LED fixtures; rated for extreme temperatures and up to 200,000 on/off cycles
- Hold off set point with automatic calibration option for convenience and added energy savings
- Adjustable via hand-held wireless configuration tool
- IP66 rated with choice of lenses for wet and outdoor locations and mounting heights from 8'
- Adjustable time delay and cut off delay
- 120-277V Standard