

SHOP NOW >

FEATURES & SPECIFICATIONS

INTENDED USE

The **Talos Architectural LED Outdoor Canopy Light Fixture** is built to replace pulse start metal halide fixtures up to 250W and features a slim, low profile design. The Talos is an ideal and attractive lighting solution for parking garages, security lighting, and other outdoor applications.

DETAILS

W 10" x **L** 10" x **D** 3.56"

Construction: Die-Cast Aluminum
Corrosion Resistant

Mounting Height: Between 8'-15'

Lens: Acrylic w/ Weatherproof UV Stabilized Gasket

Junction Box: 1/2" NPS fitter Included

Finish: UV Resistant Bronze Powder Coat

ADDITIONAL FEATURES

Voltage: 120/277

Wattage: 45W

Lumens: 4476 lms

Efficacy: 98.42 lm/W

CRI: 82.4

Color Temperature: 5000K Cool White

Dimming: 0-10V, Dimmable to 10%

Min. Operating Temperature: -40°F (-40°C)


Power Factor: >.9

Life: 50,000 Hours

Listings: cULus, E335594

Suitable for Wet Location

Wattage Equivalent: 150W MH

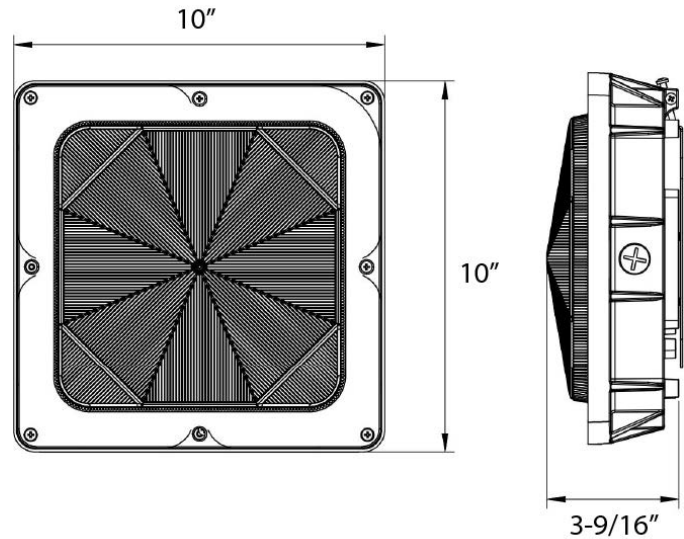

Ordering Information:

Example: (16002-PC277)

Model

16002

¹Field Installed