

## FEATURES & SPECIFICATIONS

### INTENDED USE

The **Talos Architectural LED Outdoor Canopy Light Fixture** is built to replace pulse start metal halide fixtures up to 250W and features a slim, low profile design. The Talos is an ideal and attractive lighting solution for gas stations, parking garages, security lighting, and other outdoor applications.

### DETAILS

**W** 14" x **L** 14" x **D** 3.875"

**Construction:** Die-Cast Aluminum  
Corrosion Resistant

**Mounting Height:** Between 8'-15'

**Lens:** Acrylic w/ Weatherproof UV Stabilized Gasket

**Junction Box:** 1/2" NPS fitter Included

**Finish:** UV Resistant Bronze Powder Coat

### ADDITIONAL FEATURES

**Voltage:** 120/277

**CRI:** 82.4

**Color Temperature:** 5000K Cool White

**Dimming:** 0-10V, Dimmable to 10%

**Min. Operating Temperature:** -40°F (-40°C)

**Power Factor:** >.9


**Life:** 50,000 Hours

**Listings:** cULus, E335594

Suitable for Wet Location

**Wattage Equivalent:**

175W MH (60W), 250W MH (80W)

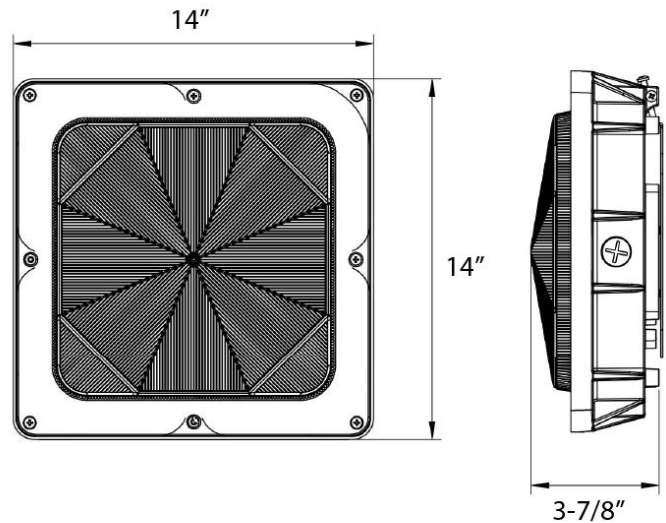

### Ordering Information:

Example: (16003-60W-PC120)

Model	Wattage & Lumens
16003	<b>60W</b> 60 watts, 7485 lms <b>80W</b> 80 watts, 9548 lms