

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

The 10 inch **Phase LED Canopy Light Fixture** features a low profile design and heat resistant lens. The Phase is an ideal option for parking structures, storage areas, shopping area walkways, entryway, and low level security.



FEATURES

Construction: Sealed die-cast aluminum profile with UV resistant powder-coating finish for indoor and outdoor applications

Color Temperature: 5000K

Voltage: 120-277V

Wattage: 27W, 40W, 60W




Dimming: 0-10V Dimming driver is standard

Lens: Heat-resistant polycarbonate optical lens

Low Operating Temperature: -22° F

Listings: cULUS, IP65, DLC premium

THIS PRODUCT IS ONLY TO BE INSTALLED BY A QUALIFIED TECHNICIAN IN ACCORDANCE WITH NATIONAL AND LOCAL ELECTRICAL CODES.

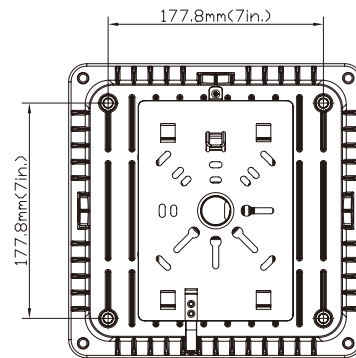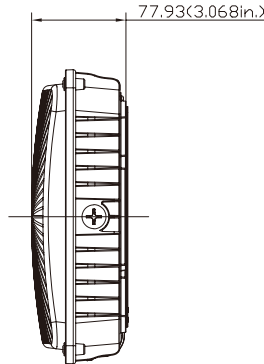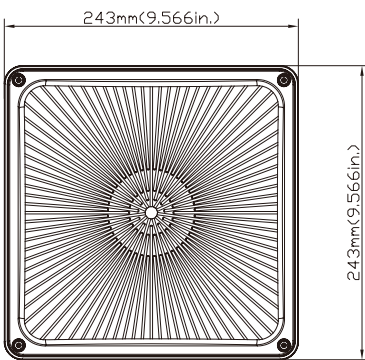

ORDERING INFORMATION Example: (16005-40W-BZ)

Model	Wattage & Lumens	Finish
16005	27W 27 watts 3800 lms 40W 40 watts 5400 lms 60W 60 watts 8000 lms	BZ Bronze WH White