

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

The Alcon Lighting 16106 Compact Thermoplastic LED Exit Sign utilizes ultra-bright red or green LEDs for improved visibility. This product is compact and energy efficient. Mounting hardware provided. Assembled In USA & UL listed for damp locations.

FEATURES

Construction: Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

Mounting: Snap mounting canopy included for top or end mount. Universal K/O pattern on back plate for wall mount.

Universal Single/Double Face: Ships single face. Includes material to convert to double face.

Voltage: 120/277 voltage

Life: ~100,000 hours


Optional Self- Diagnostics: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.

Optional Emergency Backup: 1.2V Long life, maintenance-free, rechargeable NiCd battery.

Warranty: 5 Years Carefree for Parts & Components (Labor Not Included)

Listing: Assembled In USA. Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

UL Listed for damp locations (0°C – 50°C).
Certified to CEC under Title 20 Regulations.

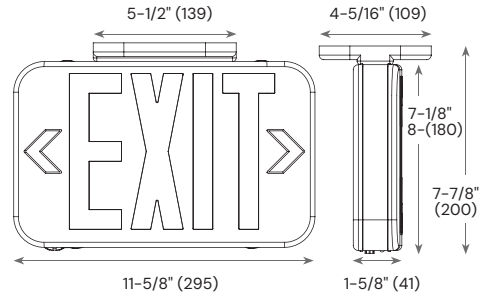

Alcon Lighting 16106 Compact Thermoplastic LED Exit Sign



ORDERING INFORMATION Example: (16106-R-WH-AC)

Model	Letter Color	Housing Finish	Operation	Options
16106	R Red G Green RG ¹ Red/Green	WH White Face/ White Housing BK Black Face/ Black Housing	AC AC-only 2A Dual circuit (120V) 2B Dual circuit (277V)	SDT ^{2,3} Self Diagnostics SW ³ Special Wording Sign ³ WG-1 Steel Wire Guard (13.5" x 15" x 6") BG-1 Polycarbonate Vandal Shield Guard (15" x 22" x 8") RM Green Running Man Sign EM Battery Back-up

¹ Field selectable
² Available only with -EM units.
³ Not available with -RG units.