

FIXTURE SPECIFICATIONS

INTENDED USE

The 16107 Architectural LED Aluminum Exit & Emergency Combo features consistently bright illumination with an energy efficient, long life light. Featuring high-performance, chrome-plated metalized reflector and polycarbonate lens for optimal light distribution. The 16107 with adjustable LED lamp heads is an ideal option for interiors where emergency exit lighting is needed.

ADDITIONAL SPECIFICATIONS

Construction: Thermoplastic LED Exit Sign Compact size low-profile design LED exit sign

Battery Back-Up: Rechargeable NiCd battery with 90+ minute emergency operation.

Mounting: Wall or Ceiling Mounting. Universal knockout pattern on back for wall mount. Snap-in mounting canopy included for Ceiling mount.


Universal Single/Double Face: Ships single face. Includes material to convert to double face.

Voltage: 120/277V Dual Voltage Operation Standard

Warranty: 5 Years Carefree for Parts & Components (Labor Not Included) (Battery Pro Rated for 2 Years)

Listings: UL listed for damp locations (32°F~104°F / 0°C~ 40°C standard).

Meets UL924, National Electrical Code, NFPA 70 and the Life Safety Code, NFPA 101.

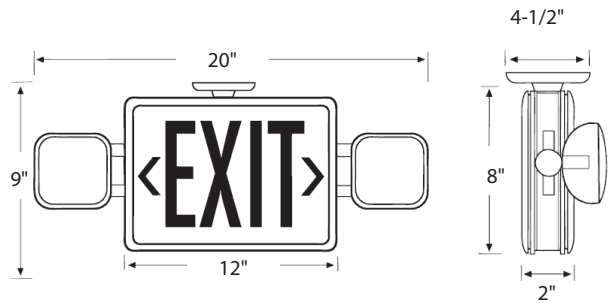

ELECTRICAL INFORMATION

	Supply Voltage	Max. Watts	Max. Amps
Red	120V/277V	3.8W	0.04A
Green		3.2W	0.03A
Red-RC		3.6W	0.033A
Green-RC		3.2W	0.03A
Red-SDT		5.7W	0.046A
Green-SDT		5.4W	0.046A
Red-RCSDT		5.6W	0.046A
Green-RCSDT		5.4W	0.044A



ORDERING INFORMATION Example: (16107-U-RD-WH)

Model	# of Faces	Letter Color	Housing Color	Options
16107	U Universal Single/Double Face	RD Red GR Green	WH White Face / White Housing BL Black Face / Black Housing	RC Remote Capable SD Self Diagnostics WG-3 Steel Wire Guard BG-3 Polycarbonate Vandal Shield Guard