

FIXTURE SPECIFICATIONS

INTENDED USE

The 16114 Combination LED Exit and Emergency Spot Light is a unique new design made with extruded aluminum housing and a spec-grade curve face plate. This product is compact and energy efficient. The 904 is perfect for hotels, offices, retail outlets, restaurants, and more.

SIZE

L 12.5" x H 11"

ADDITIONAL SPECIFICATIONS

Universal wall mounting K/O pattern. Canopy and mounting hardware provided.


Maintenance-free and rechargeable Ni-Cad battery; Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

90 minute emergency illumination (minimum) with LVD (Low Voltage Disconnection) preventing battery from deep discharge.

Meets UL924, NFPA 70 Life Safety Code, NFPA 101, NEC, OSHA, Local and State Codes.

UL listed for wet locations (-20°C - 50°C / -4°F - 122°F)

Voltage: 120/277V

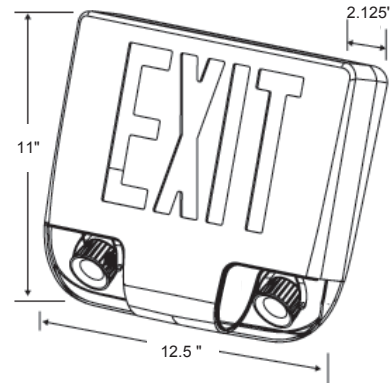

ORDERING INFORMATION Example: (16114-S1-RD-WH-WH-AC)

Model	# of Faces	Letter Color	Housing Color	Face Finish	Driver
16114	1 Single	RD Red	WH White	WW White	AC AC-Only
	2 Double	GR Green	BL Black	WG Black	BB Battery Backup
	3 Universal Single/Double		BA Brushed Aluminum	WB Brushed Aluminum	

¹ Steel Wire Guard dimensions: 13.5" x 15" x 6"

² Polycarbonate Vandal Shield Guard : 15" x 22" x 8"

³ Auto battery discharge once every 30 days and once every 12 months