

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

The Alcon Lighting 16115 Combination LED Exit and Emergency Light utilizes ultra-bright white LEDs for improved visibility. This product is compact and energy efficient. Universal wall mounting K/O pattern. Canopy and mounting hardware provided. UL listed for damp locations & meets UL924, NEC, NFPA 101 Life Safety Code, OSHA.



FEATURES

Construction: Thermoplastic LED exit sign compact size low-profile design LED exit sign

Mounting: Wall or ceiling mounting


Universal Single/Double Face: Ships single face. Includes material to convert to double face.

Voltage: 120/277V dual voltage operation standard

Emergency Back-Up: Internal solid-state transfer switch automatically connects the internal battery to LEDs for minimum 90 minute emergency illumination.

Warranty: 5 years carefree for parts & components (labor not included)
(battery prorated for 2 years)

Listings: UL listed for damp locations & meets UL924, National Electrical Code, NFPA 70 and the Life Safety Code, NFPA 101.

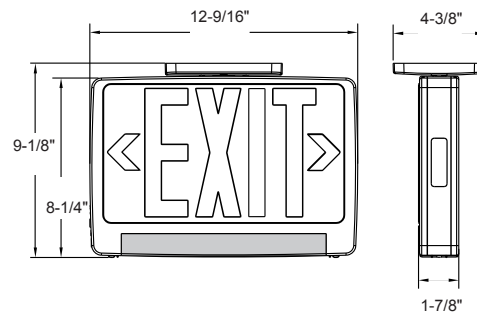

ORDERING INFORMATION Example: (16115-U-RD-WH)

Model	# of Faces	Letter Color	Face / Housing Finish	Options
16115	U Universal Single/Double Face	RD Red	WH White/White	SDT Self Diagnostic Test
		GR Green	BK Black/Black	SWG Steel Wire Guard (13.5" x 15" x 6")
				PVS Polycarbonate Vandal Shield (15" x 22" x 8")
				PG Polycarbonate Guard (3.25" x 9" x 2.75")