

FIXTURE SPECIFICATIONS
INTENDED USE

The Alcon Lighting 16123 Thin Die-Cast Aluminum LED Exit Sign utilizes ultra-bright red or green LEDs for improved visibility. This product is compact and energy efficient. Mounting hardware provided. UL listed for damp locations.

FEATURES

Construction: Premium-grade, die-cast aluminum housing. Optional power coated white or black finish available.

Mounting: Aluminum mounting canopy included for top or end mount. Universal knockout pattern on back plate for wall mount.

Voltage: 120/277 voltage

Optional Self- Diagnostics: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.

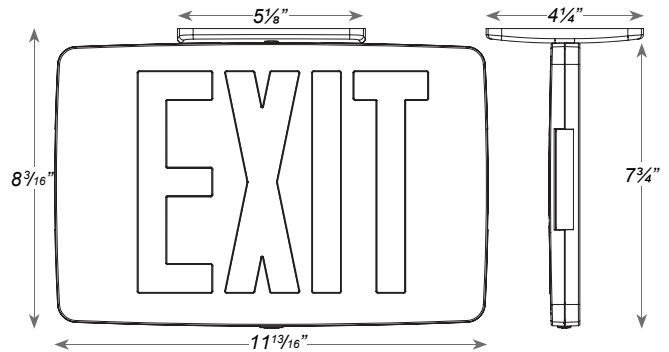
Optional Emergency Backup: 4.8V long life, maintenance-free, rechargeable NiCd back up battery.

Warranty: 5 Years Carefree for Parts & Components (Labor Not Included)

Listing: Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

UL Listed for damp locations (0°C – 50°C).

Certified to CEC under Title 20 Regulations.


ORDERING INFORMATION Example: (16123-1-RD-WH)

Model	# of Faces	Letter Color	Housing Finish	Options
16123	1 Single	RD Red	WH White	EM Battery Backup
	2 Double	GR Green	BK Black	
			AL Aluminum	