

## FIXTURE SPECIFICATIONS

### INTENDED USE

The Thermoplastic Exit and Emergency Combo LED Sign utilizes ultra-bright red or green LEDs for improved visibility. This product is compact and energy efficient. Mounting hardware provided. Assembled In USA & UL listed for damp locations.

### FEATURES

**Construction:** Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

**Mounting:** Snap mounting canopy included for top or end mount. Universal K/O pattern on back plate for wall mount.

**Universal Single/Double Face:** Ships single face. Includes material to convert to double face.

**LED Lamps:** X2 1.5 watt adjustable LED lamp heads provide up to 30-ft center-to-center spacing with 3-ft path of egress at 10-ft mounting height.

**Voltage:** 120/277 voltage

**Optional Self-Diagnostics:** Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.

**Emergency Backup:** Includes 3.6V Long life, maintenance-free, rechargeable NiCd battery.


**Warranty:** 5 Years Carefree for Parts & Components (Labor Not Included)

**Listing:** Assembled In USA.

Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

UL Listed for damp locations (0°C – 50°C).

Certified to CEC under Title 20 Regulations.

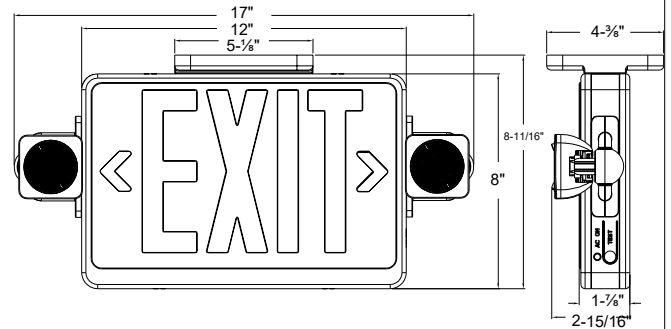

## ORDERING INFORMATION Example: (16129-R-WH)

Model	Letter Color	Housing Finish	Options
16129	RD Red	WH White	ST <sup>1</sup> Self-Diagnostics
	GR Green	BK Black	