


Installation Instructions


- This product must be installed in accordance with all applicable codes by a person familiar with the product.
- Each fixture must be **properly supported** during install.
- **DO NOT** join fixtures on the floor prior to lifting, or damage will occur.

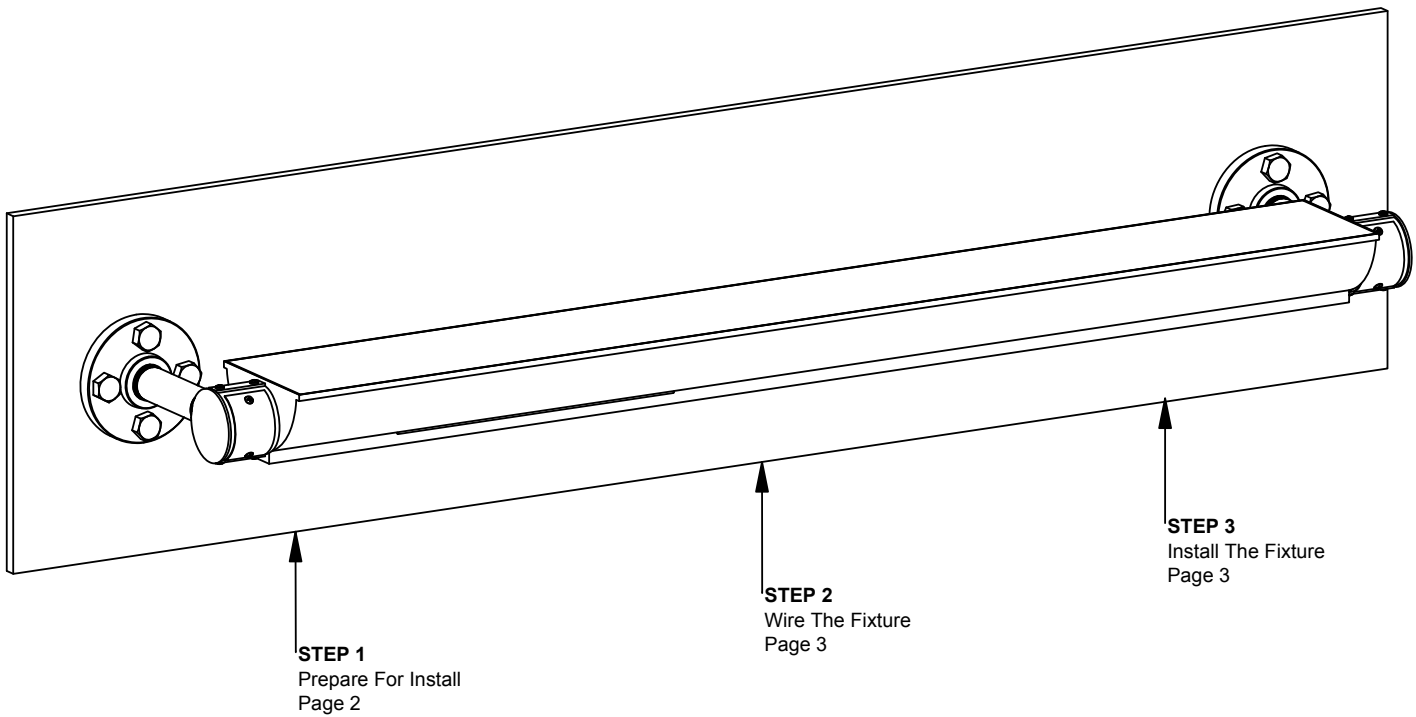

Your particular build may vary.


Preparation - Tools/Parts Identification

A. Identify Fixtures

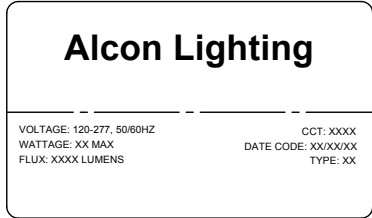


- Use labels found on the box and inside fixture bodies to identify bodies.
- **NOTE:** Locations of labels can vary.
- Remove all fixtures from their boxes.
- Organize fixtures based on their labels at the install location.

B. Tools Needed

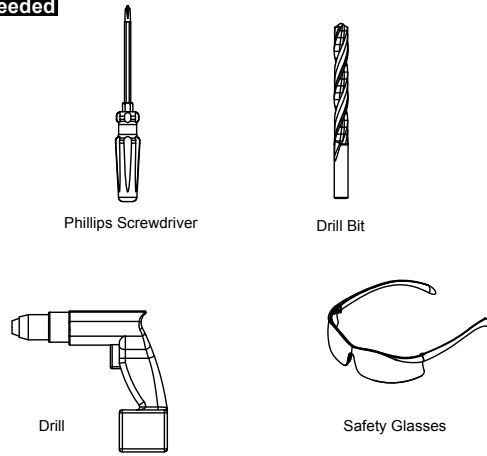

- Always use proper safety equipment when installing fixtures.
- Tools shown are recommended for standard install. Tools needed may vary based on actual install location conditions.


C. Identify Parts

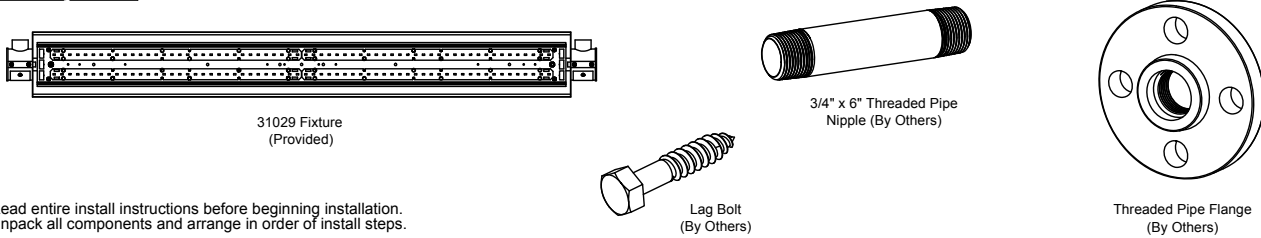

- Read entire install instructions before beginning installation.
- Unpack all components and arrange in order of install steps.


Step 1 - Prepare For Install

A. Transfer Measurements




- Confirm that the distance shown between mounting locations above matches your fixture. • Transfer the dimensions to the desired location on the mounting surface.

B. Mount Threaded Flange

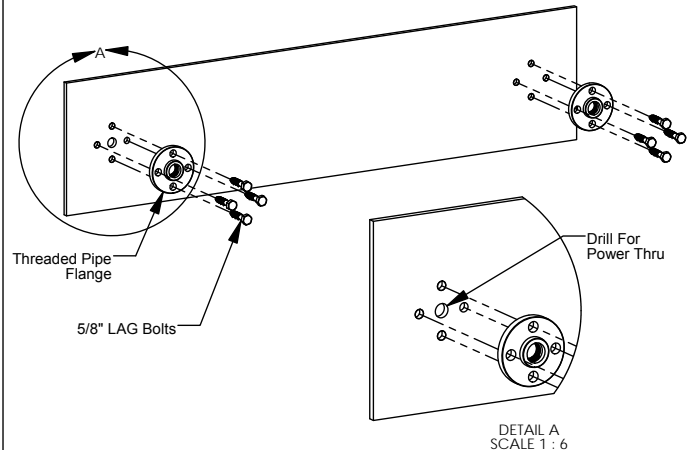


- Determine the power side, then drill hole on center of transferred C for that side.
- After marking the mounting locations, install threaded pipe flanges (by others) as shown above.
- Secure the flanges with LAG bolts as shown.
- **Important: The surface and hardware must be able to properly support the fixture weight.**

Items Used In This Step

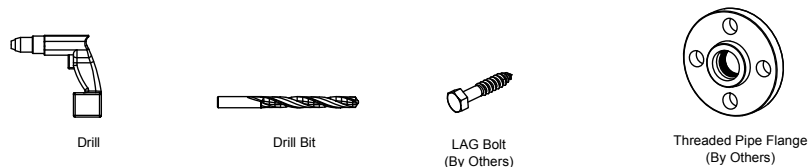


Step 2 - Wire The Fixture

A. Pull Power Thru

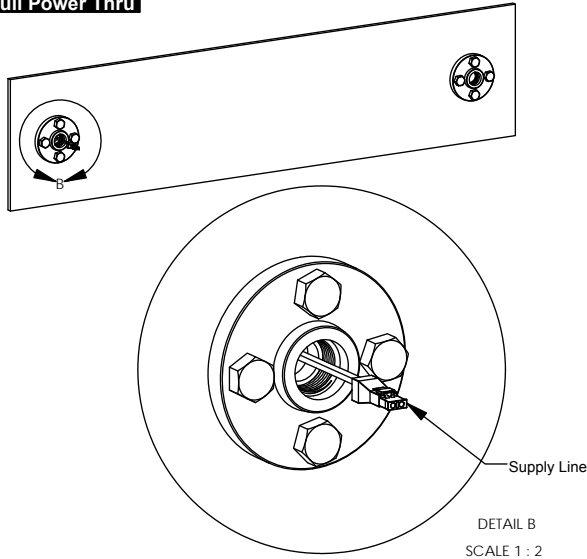


Pull the supply line thru the hole drilled in the mounting surface and thru the installed pipe flange.

B. Connect The Wiring

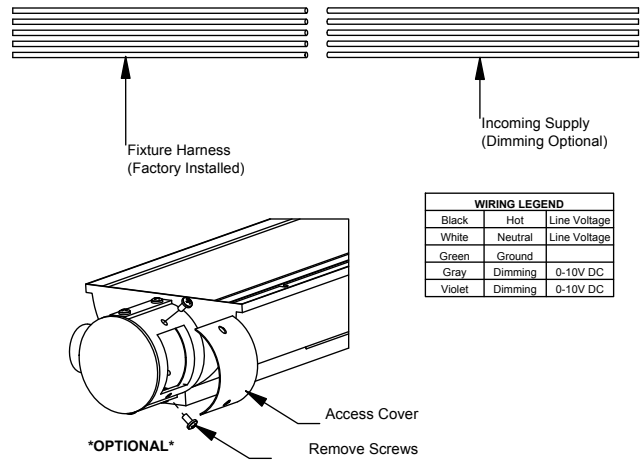

- Wire the fixture to the incoming supply. Refer to the wiring legend above as needed.
- **Note:** Use UL approved connectors only. Follow all local, state and national codes.
- **Optional:** It may be necessary to remove the wire access cover by removing the (2) screws as shown.


Items Used In This Step



Phillips Screwdriver


Step 3 - Install The Fixture

A. Install The Fixture

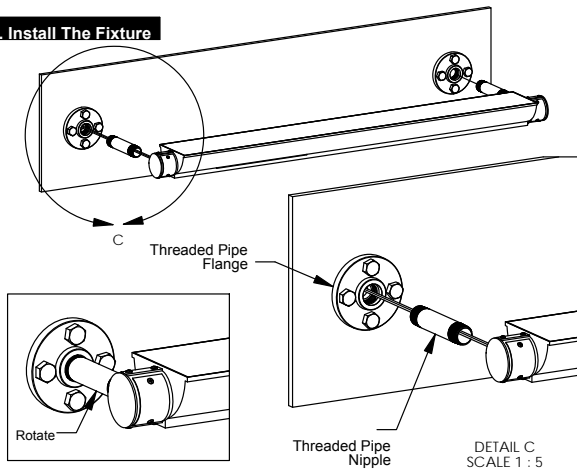

- Line up the fixture, the 1" x 6" threaded nipple, and the threaded pipe flange on both ends.
- Press all together, and rotate the threaded pipe nipples clockwise to tighten.

B. Adjust The Fixture

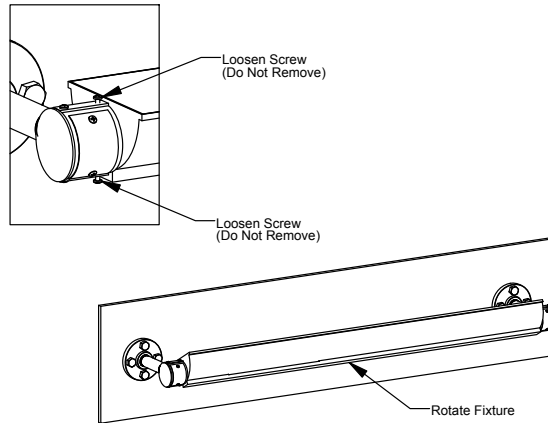

- To adjust the fixture, loosen (**DO NOT REMOVE**) the inside screws shown on each fixture end.
- Rotate the fixture body to the desired angle for best illumination.
- Tighten the screws again to secure the fixture. Install is now complete.

Items Used In This Step



3/4" x 6" Threaded Pipe Nipple (By Others)




Phillips Screwdriver

Installation Instructions for joining two units together

STEP (3)

Run wires from both fixtures through the conduit hole.

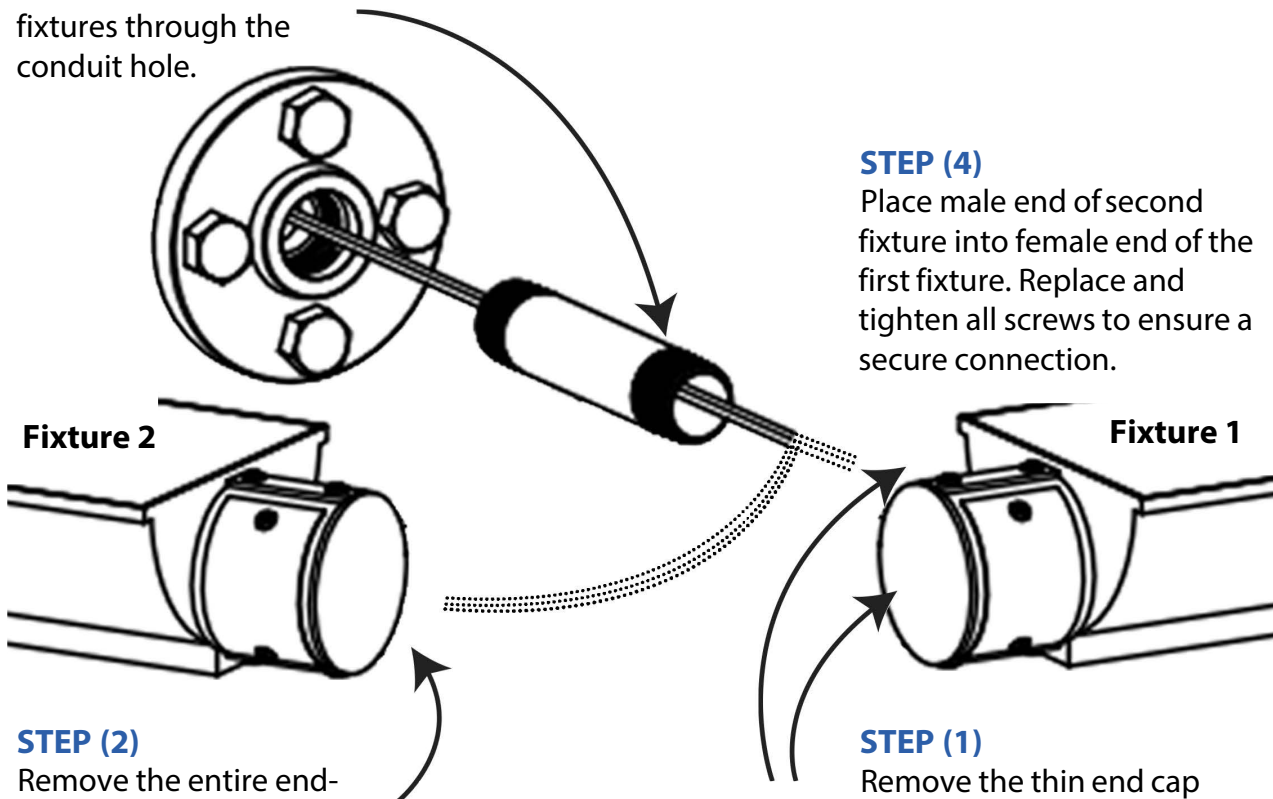**STEP (4)**

Place male end of second fixture into female end of the first fixture. Replace and tighten all screws to ensure a secure connection.

STEP (2)

Remove the entire end-piece by removing all (4) screws, (2) on top and (2) at the bottom.

STEP (1)

Remove the thin end cap by loosening the top front screw.