

**SPECIFICATION SHEET: 5W Remote Emergency Back-up Battery**


**Description:** Emergency LED Driver - Output 5W (Constant) - Universal Voltage - 100-250mA - 20-50V Forward Voltage - Long Case with Wire

**This Driver Will Operate The Following LED Modules:**  
Any LED module designed to accept constant input current of 100-250mA and that has a forward input voltage range of 20-50VDC.

**ELECTRICAL DATA**

Input Voltage	120-277VAC, 50/60Hz
Input Current	0.061A Max.
Input Power	3.9W
Output Current	100-250mA
Output Voltage Range	20-50Vdc
Output Power/ Lumens	5W (Constant)/ 800lm
Battery Type/ Model Number	Ni-Cd 4.8Vdc
Battery Capacity Available	13.4WH
Recharge Time	24 Hours
Number of Output Channels	1
RFI/EMI	FCC Part 15A Non-Consumer
Output Type	Class 2
Ambient Operating Temperature Range	0°C to 50°C
Surge Protection	Per C62.41 (TVS)
Protections	Input Overcurrent Protection (Fusible link)
Service Life	50,000 Hours
Approvals / Class	ULus Class 2; Damp Locations

**MECHANICAL DATA**

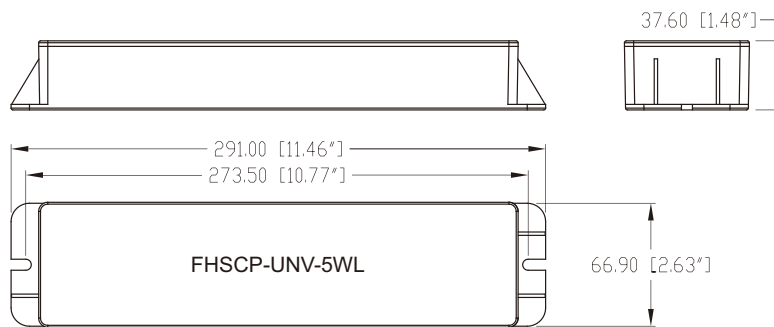

Tolerance=±0.02"

**NOTE : This Driver Must Be Grounded**

**WIRING DIAGRAMS**

