

Project Name:

Type:

Quantity:

## FIXTURE SPECIFICATIONS

### INTENDED USE

The specification grade **Fluorescent Indoor Modern Architectural Linear Wall Mount - Direct/Indirect** delivers continuous clean lines and clear wall light to commercial, hospitality and residential interior wall lighting applications. Our slim profiles and stylish modern wall sconces offer excellent direct and indirect lighting, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more.

### DIMENSIONS

**3FT | W 7.25" x L 36" x H 3"**

### FEATURES

**Construction:** Die-formed 20 gauge cold-rolled steel. Parabolic semi-specular aluminum louvers with flat steel end plate is standard.

**Reflector:** Die-formed high-reflective white reflector with flat steel end plate

**Light Distribution:** 5% down, 95% up

**Dimming:** 0-10V option



**Voltage:** 120-277V

**Color Temperature:** 3000K

**CRI:** 80+

**Warranty:** 3 years carefree for parts & components (Labor not included)

**Listings:** UL listed for dry and damp location, ARRA compliant

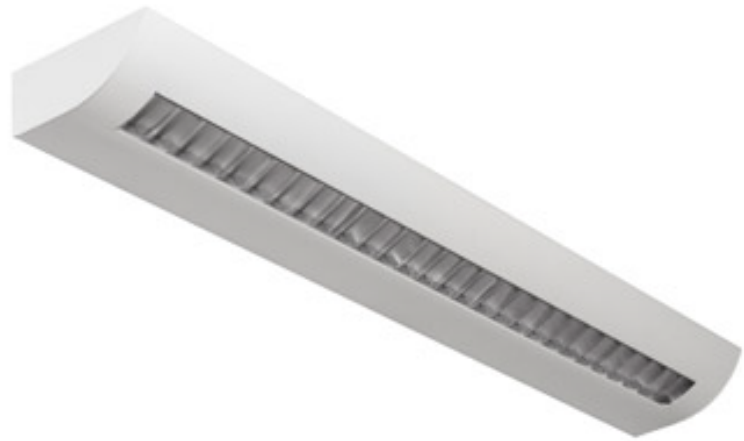

## ORDERING INFORMATION Example: ( 6020-3-1-25)

Model	Wattage Package	Finish	Options
<b>6020-3</b>	<b>1-25</b> 1 Lamp 25 Watt T8	<b>Blank</b> Matte White	<b>DM7</b> 0-10V Mark7 Dimming
	<b>2-25</b> 2 Lamp 25 Watt T8 (50 Total Watts)	<b>AL</b> Light Gray	<b>MS</b> Occupancy Sensor
	<b>1-21</b> 1 Lamp 21 Watt T5		<b>DL</b> Damp Location Label
	<b>2-21</b> 2 Lamp 21 Watt T5 (42 Total Watts)		<b>EM500</b> Emergency Ballast (500 lum)
			<b>EM800</b> Emergency Ballast (800 lum)
			<b>EM1300</b> Emergency Ballast (1300 lum)

Alcon Lighting 6020-3 Fluorescent Indoor Modern Architectural Linear Wall Mount - Direct/Indirect