

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

The specification grade Fluorescent Indoor Modern Architectural Linear Wall Mount - Direct/Indirect delivers continuous clean lines and clear wall light to commercial, hospitality and residential interior wall lighting applications. Our slim profiles and stylish modern wall sconces offer excellent direct and indirect lighting, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more.

DIMENSIONS

4FT | W 7.25" x L 48" x H 3"

ADDITIONAL FEATURES

Construction: Die-formed 20 gauge cold-rolled steel. Parabolic semi-specular aluminum louvers with flat steel end plate is standard.

Reflector: Die-formed high-reflective white reflector with flat steel end plate

Light Distribution: 5% down, 95% up

Dimming: 0-10V option



Voltage: 120-277V

Color Temperature: 3000K

CRI: 80+

Warranty: 3 years carefree for parts & components (Labor not included)

Listings: UL listed for dry and damp location, ARRA compliant

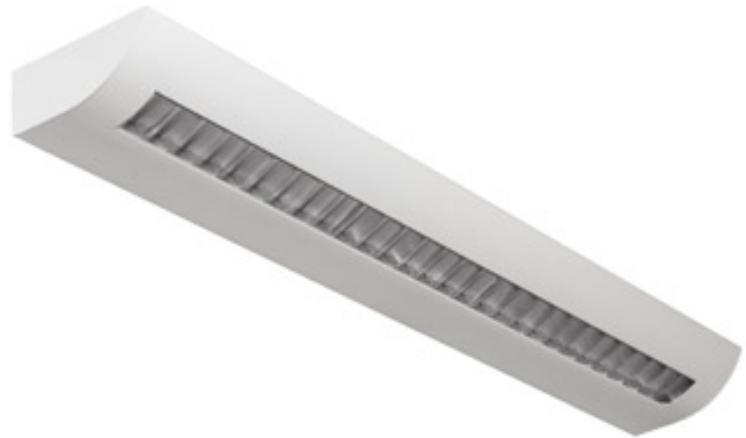

ORDERING INFORMATION Example: (6020-4-1-32)

Model	Wattage Package	Finish	Options
6020-4	1-32 1 Lamp 32 Watt T8	Blank Matte White	DM7 0-10V Mark7 Dimming
	2-32 2 Lamp 32 Watt T8 (64 Total Watts)	AL Light Gray	MS Occupancy Sensor
			DL Damp Location Label
	1-54 1 Lamp 54 Watt T5HO		EM500 Emergency Ballast (500 lum)
2-54 2 Lamp 54 Watt T5HO (108 Total Watts)		EM800 Emergency Ballast (800 lum)	
		EM1300 Emergency Ballast (1300 lum)	

6020-4 Fluorescent Indoor Modern Architectural 4 Foot Linear Wall Mount - Direct/Indirect