

Project Name: \_\_\_\_\_ Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

### INTENDED USE

The specification grade Fluorescent Indoor Modern Architectural Linear Wall Mount – Direct/Indirect delivers continuous clean lines and clear wall light to commercial, hospitality and residential interior wall lighting applications. Our slim profiles and stylish modern wall sconces offer excellent direct and indirect lighting, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more.




### AVAILABLE LENGTHS

<b>2FT</b>	<b>W</b>	7.25"	x	<b>L</b>	24"	x	<b>H</b>	3"
<b>3FT</b>	<b>W</b>	7.25"	x	<b>L</b>	36"	x	<b>H</b>	3"
<b>4FT</b>	<b>W</b>	7.25"	x	<b>L</b>	48"	x	<b>H</b>	3"
<b>8FT</b>	<b>W</b>	7.25"	x	<b>L</b>	96"	x	<b>H</b>	3"

### FEATURES

- Construction:** Die-formed 20 gauge cold-rolled steel
- Reflector:** Die-formed high-reflective white reflector with flat steel end plate
- Light Distribution:** 5% down, 95% up
- Voltage:** 120-277V
- Warranty:** 3 years carefree for parts & components (Labor not included)
- Listings:** UL listed for dry and damp location, ARRA compliant Lamps not included

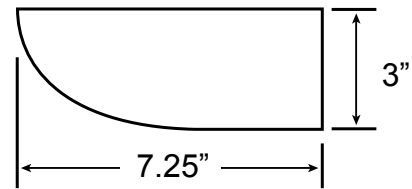

### ORDERING INFORMATION Example:

Model	Wattage Package	Finish	Options
<b>6021-4</b>	<b>1-32</b> 1 Lamp 32 Watt T8	<b>Blank</b> Matte White	<b>DM7</b> 0-10V Mark7 Dimming
	<b>1-54</b> 1 Lamp 54 Watt T5	<b>AL</b> Light Gray	<b>MS</b> Occupancy Sensor
	<b>2-32</b> 2 Lamp 32 Watt T8 (64 Total Watts)		<b>DL</b> Damp Location Label
	<b>2-54</b> 2 Lamp 54 Watt T5 (108 Total Watts)		<b>EM500</b> Emergency Ballast (500 lum)
			<b>EM800</b> Emergency Ballast (800 lum)
			<b>EM1300</b> Emergency Ballast (1300 lum)

Alcon 6021-4 Fluorescent Indoor Modern Architectural 3 Foot Linear Wall Mount – Direct/Indirect