


SHOP NOW >

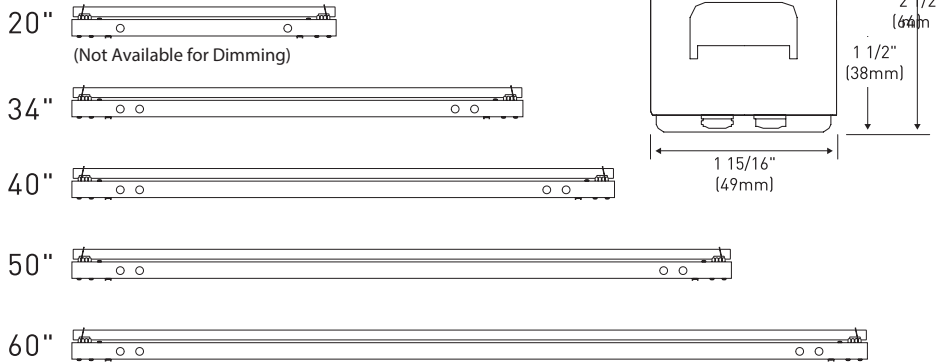

FIXTURE SPECIFICATIONS

INTENDED USE

The **Aeon Architectural Linear Fluorescent Fixture** features smooth and continuous illumination and continuous run capability. The Aeon is an ideal fixture for commercial and industrial applications where clean and efficient lighting is desired.

PRODUCT FAMILY

10100 | Pendant Mount

AVAILABLE DIMENSIONS

- 20"** | L 19.2" x W 1.9" x H 2.5"
- 34"** | L 33.6" x W 1.9" x H 2.5"
- 40"** | L 39.5" x W 1.9" x H 2.5"
- 50"** | L 49.3" x W 1.9" x H 2.5"
- 60"** | L 59.2" x W 1.9" x H 2.5"

FEATURES

- Construction:** Extruded Aluminum Fixture Including Snap-Fit Cover, Spring Clip Lamp Sockets, and Lamp Retaining Wires
- Ballasts:** Class P Rating, Thermal Protection
- Finish:** Anodized Aluminum
- Electrical:** Pre-Wired with Factory Installed Quick-Connectors for Power Feed and Low Voltage Connection
- Voltage:** 120V or 277V
- Lumen Efficiency:** 94%
- CRI:** 88
- Life:** 20,000 Hours
- Listings:** UL Listed for Indoor Use



ORDERING INFORMATION Example: (6024-120V-2-FRT500-28K)

Model	Voltage	Size, Wattage, & Lumens	Color Temp
6024	120V 120V	2-FRT500 20" 17 watts 1310 lumens	25K 2500K
			28K 2800K
	277V 277V	3-FRT850 30" 27 watts 2170 lumens	30K 3000K
			35K 3500K
		4-FRT1000 40" 31 watts 2550 lumens	42K 4200K
			50K 5000K
		5-FRT1250 50" 39 watts 3250 lumens	67K 6700K
			RD Red
		6-FRT1500 60" 46 watts 3850 lumens	GR Green
			BL Blue