

Project Name:


Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

The Alcon Lighting Side Basket Fluorescent Troffer is configured for recessed applications in commercial and industrial buildings. The fluorescent light with side baskets provide soft ambient in direct and indirect lighting, ideal for schools and modern office lighting applications.

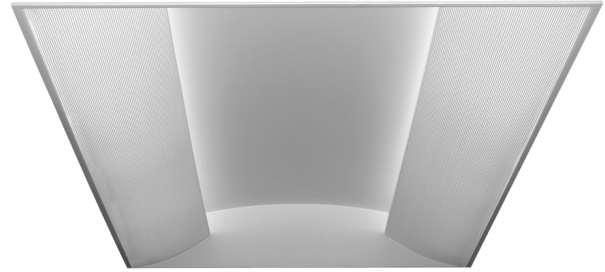

AVAILABLE SIZES

- 2x2** | W 23.93" x L 23.75" x D 5.5"
- 2x4** | W 23.93" x L 47.75" x D 5.5"
- 1x4** | W 11.93" x L 47.75" x D 5.5"
- 1x2** | W 11.93" x L 23.75" x D 5.5"

FEATURES

- Construction:** Die-formed, cold-rolled, heavy gauge steel housing
- Finish:** White powder coated
- Reflectors:** Textured Matte White
- Voltage:** 120-277V (50/60 Hz) Constant Current
- Mounting:** T-Bar
- Listings:** Suitable for Damp Locations
- Warranty:** 1 Years Carefree for Parts & Components (Labor Not Included)




ORDERING INFORMATION Example: (7018-22-4-T8-G-EM)


Model	Size	# of Lamps	Lamp Type	Trim Type	Ballast	Options
7018	22 2x2	2 2 Lamp	^{2x2 Options} T8 F17T8 (24")	G Grid F Flange ²	Blank T8 Electronic Ballast, Instant Start, <10% THD or T5 Electronic Ballast, Programmed Start, <10% THD LBF T8 Electronic Ballast, Instant Start, Low Watt, <10% THD HBF T8 Electronic Ballast, Instant Start, High Light Output, <10% THD PS T8 Electronic Ballast, Programmed T8 Start, <10% THD LPS Electronic Ballast, Programmed Start, Low Watt, <10% THD HPS Electronic Ballast, Programmed Start, High Light Output, <10% THD	DM Dimming Ballast EM Emergency Ballast ARRA Assembled in USA for Buy American Act
		4 4 Lamp	T5HO F24T5HO (22")			
	24 2x4	2 2 Lamp	^{2x4 Options} 28T5 F28T5 (46")			
		4 4 Lamp	25T8 F25T8 (48")			
			28T8 F28T8 (48")			
			32T8 F32T8 (48")			
			54T5HO F54T5HO (46") CF40 CF40 TT5 (22.5") ¹			
	14 1x4	1 1 Lamp	^{2x4 Options} 28T5 F28T5 (46")			
		2 2 Lamp	25T8 F25T8 (48")			
			28T8 F28T8 (48")			
			32T8 F32T8 (48") 54T5HO F54T5HO (46")			
	12 1x2	1 1 Lamp	^{1x2 Options} 14T5 F14T5 (22")			
2 2 Lamp		17 F17T8 (24")				
		24T5HO F24T5HO (22")				
		CF40 TT5, (22.5") ¹				
		14T5 F14T5 (22") 17 F17T8 (24") 24T5HO F24T5HO (22")				

¹ Twin tube compact, 2G11 base: 40 watt
² Flange kits are supplied in separate boxes, field installed.

FIXTURE DIMENSIONS

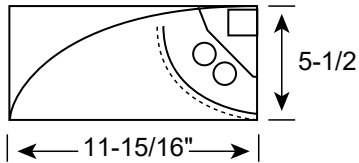


1x2
1x4

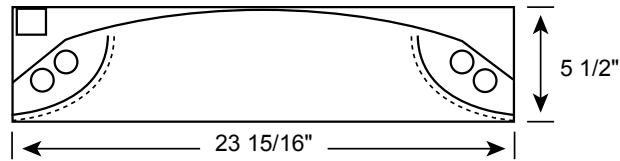

2x2
2x4

WIRING DIAGRAM FOR LED READY

Applied AC voltage depends on LED tube specifications



Single End Power (Std.)



Double End Power (optional)