

FEATURES & SPECIFICATIONS

INTENDED USE


The 902 Compact Wet Location LED Exit Sign is designed with 6" with 3/4" stroke letters for improved visibility. This product is compact and energy efficient. The 902 is perfect for hotels, offices, retail outlets, restaurants, and more.

SIZE

L 12.5" x H 8.5"

ADDITIONAL SPECIFICATIONS

- Universal wall or ceiling mounting. Canopy and mounting hardware provided.
- Maintenance-free and rechargeable Ni-Cad battery; Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- 90 minute emergency illumination (minimum) with LVD (Low Voltage Disconnection) preventing battery from deep discharge.
- 5VA flame retardant; Fully gasket enclosure
- NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL listed for wet locations (-20°C - 50°C / -4°F - 122°F)
- Voltage: 120/277V

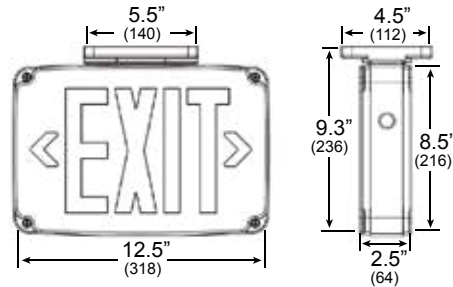

Listings:



Ordering Information:

Example: (902-S-R-1-GR)

Model	# of Faces	Letter Color	Driver	Face/Housing Finish	Options					
902	S D	Single Double	R G	Red Green	AC 1 2	AC only Battery Backup Dual Circuit	WH BK GR	White / White White / Black White / Gray	WG1 BG1 SDT TR	Steel Wire Guard ¹ Polycarbonate Vandal Shield Guard ² Self Diagnostic Test ³ Tamper Proof Screws

¹ Steel Wire Guard dimensions: 13.5" x 15" x 6"

² Polycarbonate Vandal Shield Guard : 15" x 22" x 8"

³ Auto battery discharge once every 30 days and once every 12 months