

FEATURES & SPECIFICATIONS

INTENDED USE


The 903 Combination LED Exit and Emergency Light utilizes ultra-bright white LEDs for improved visibility. This product is compact and energy efficient.

SIZE

L 12 9/16" x H 8 1/4"

ADDITIONAL SPECIFICATIONS

- Remote capable comes standard. Connect two additional LED heads; not included.
- Universal wall mounting K/O pattern. Canopy and mounting hardware provided.
- Maintenance-free and rechargeable Ni-Cad battery; Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Ultra-bright LED lamps. 4.5W per light pipe (36 LED x 0.125 watts)
- 90 minute emergency illumination (minimum) with LVD (Low Voltage Disconnection) preventing battery from deep discharge.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for wet locations (-20°C - 50°C / -4°F - 122°F)
- Voltage: 120/277V

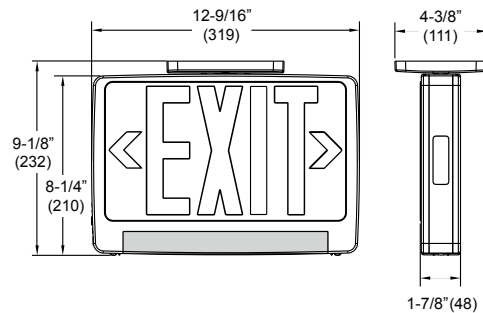

903 Combination LED Exit and Emergency Light

Listings:



Ordering Information:

Example: (903-U2-R-WH)

Model	# of Faces	Letter Color	Face/Housing Finish	Options
<input type="text" value="903"/>	<input type="text" value="U2"/>	<input type="text" value="R"/>	<input type="text" value="WH"/>	<input type="text" value="WG1"/>
903	U2 Universal Single/Double Face	R Red G Green	WH White / White BK Black / Black	WG1 Steel Wire Guard (13.5" x 15" x 6") PCS1 Polycarbonate Guard (3.25" x 9" x 2.75") BG1 Polycarbonate Vandal Shield Guard (15" x 22" x 8") SDT Self Diagnostic Test ¹

¹ Auto battery discharge once every 30 days and once every 12 months