

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

This drive-over-rated LED uplight offers superior weather and insect protection. Featuring a durable cast brass finish, a heat-resistant lens, and heat-dissipating holes, this energy-efficient architectural fixture is ideal for illuminating shrubs, trees, and pathways in residential and commercial landscapes, enhancing both aesthetics and security.

FEATURES

W 7.25" x H 6.25"

Construction: Cast Brass Adjustable Fixture with Aiming Mechanism, Suspended Inside PVC Sleeve

Finish: Cast Brass

Lens: Clear and Heat resistant Flat Glass

Faceplate: Cast Brass with Heat Dissipative Holes

Socket: Top Grade Fixed Ceramic Bi-Pin Socket

Gasket: Weather Tight Protection

Wiring: Pre-Wired with a 3 FT 18-2 SJT-W Direct Burial Cord

Mounting: In-Ground Direct Burial or Concrete Encasement

Tilt Degree: $\pm 40^\circ$

Voltage: 12V

Wattage: 5W

Color Temperature: 27/30/40/50K

Lumens: 500 lm

CRI: 80+


Life: 50,000 Hrs

Warranty: 5 years Carefree for parts & components (Labor not included)

Listings: cETLus Listed, Wet Location



Adjustable fixture with aiming mechanism is suspended inside sleeve.

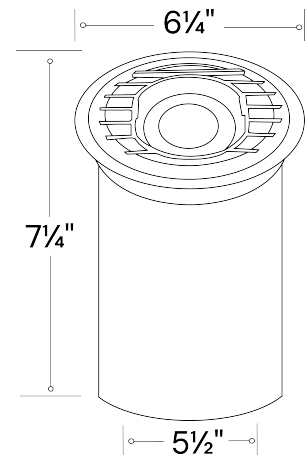

ORDERING INFORMATION Example:

Model	Color Temp	
9031	27K	2700K
	30K	3000K
	40K	4000K
	50K	5000K