

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

The drive-over rated LED uplight is designed for weather and insect protection. This low energy, high quality architectural fixture, with a finish in cast brass, heat-resistant lens and heat-dissipating holes, is made for landscape applications to uplight shrubs, trees and pathways for either accent or safety and security lighting in residential and commercial projects.

FEATURES

Dimensions: W 7.25" x H 6.25"

Construction: Cast Brass Adjustable Fixture with Aiming Mechanism, Suspended Inside PVC Sleeve

Finish: Cast Brass

Mounting: In-Ground Direct Burial or Concrete Encasement

Faceplate: Cast Brass with Heat Dissipative Holes

Lens: Clear and Heat resistant Flat Glass

Socket: Top Grade Fixed Ceramic Bi-Pin Socket

Gasket: Weather Tight Protection

Wiring: Pre-wired with a 3 FT 18-2 SPT2-W Direct Burial Cord

Electrical: Remote 12V Transformer Required

Voltage: 9-17V

Wattage: 5W


Life: 50,000 Hours

Lamp Equivalent: 12V, MR-16 Halogen 50W Max

Warranty: Limited Lifetime Warranty on Fixture



Adjustable fixture with aiming mechanism is suspended inside sleeve.

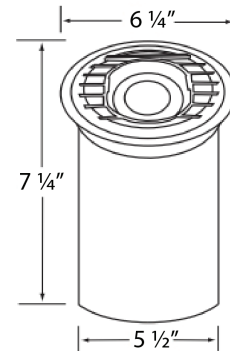

ORDERING INFORMATION Example:(9031-30K-15)

| Model | Color Temperature | Beam Spread |
|-------|----------------------------|--------------------------------------------------------|
| 9031 | 27K - 2700K 30K - 3000K | 15 - 15° Spot 38 - 38° Flood 60 - 60° Wide Flood |