

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

This fiberglass LED well light features an open face cover to maximize light with a tempered glass lens but no grill. The tempered glass is designed to protect from environmental and abrasive salty, oceanfront conditions. Suitable for soil or concrete. The in-ground light functions in almost any location.

DETAILS

Dia 6.75" x **W** 6.75" x **H** 8.1"

Construction: Corrosion-resistant fiberglass

Installation: Rated for in-ground soil and concrete applications

Lens: Clear, heat-resistant, tempered glass




Finish: Bronze

Beam Spread: 120°

RGBW Controller: Bluetooth via Smart Life - Smart Living mobile app (available for [iOS](#) and [Android](#) devices) **Life:** 35,000 Hours

Listing: cETLus, Marine-Grade,

Assembled in the USA, IP65

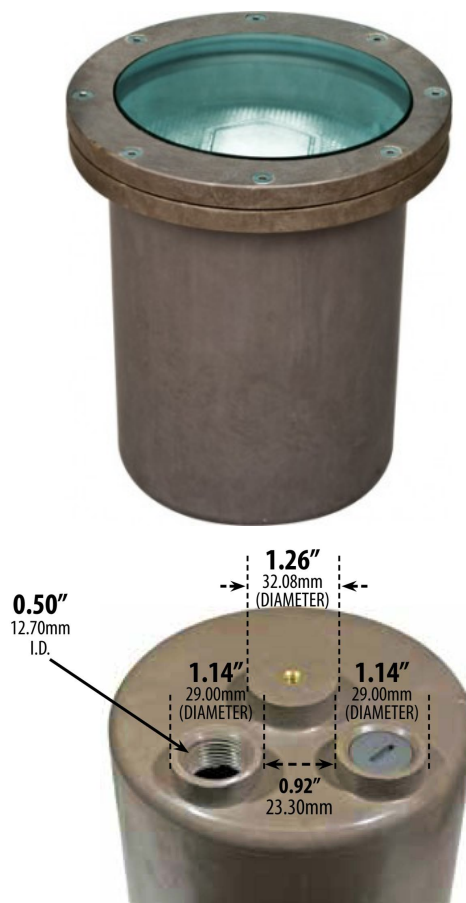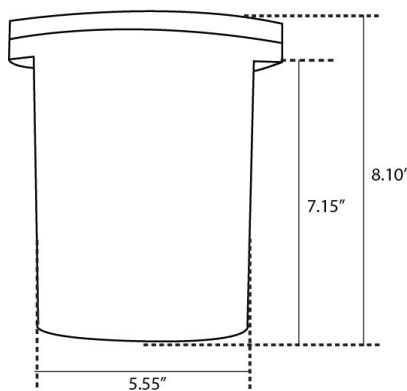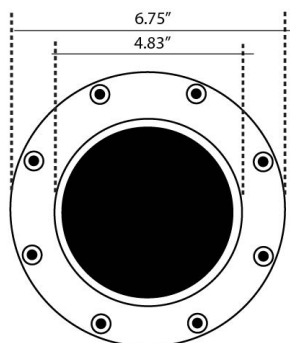

Ordering Information: Example: (9042-RGBW)

Model

9042

Lamp Type

RGBW | RGBW | 15W | 1300 lms | 120° Beam Spread | 120V

W-25 | White | 12.5W | 1200 lms | 25° Beam Spread | 120-277V
W-40 | White | 12.5W | 1200 lms | 40° Beam Spread | 120-277V

Color Temp

(Blank) | RGB + W (27-64K)

27K | 2700K
30K | 3000K
40K | 4000K
50K | 5000K